

# AZAD GOVERNMENT OF THE STATE OF JAMMU AND KASHMIR

# **COMPOSITE SCHEDULE OF RATES**

Updated for 2<sup>nd</sup> Semi-annual (Jan - June) 2018-19

## **DISTRICT BAGH**

PLANNING AND DEVELOPMENT DEPARTMENT, KASHMIR PLAN HOUSE. BLOCK NO. 11, NEW CIVIL SECRETARIAT, Go.AJK MUZAFFARABAD.

Ph. 05822-924117. www.pndajk.gov.pk, chief.ra@pndajk.gov.pk.



# **PREFACE**

The Planning & Development Department, Government of AJ&K felt the need to have a Composite Schedule of Rates (CSR) for AJ&K. The Composite Schedule of Rates was required to introduce a common basis for value engineering in accordance with the geophysical conditions and available resources of AJ&K. National Engineering Services Pakistan (Pvt.) Limited (NESPAK), being the largest Consultant firm and having a rich experience of various projects in AJ&K was engaged to carry out the assignment. It was agreed that due to urgency of implementing a CSR for ongoing development works in AJ&K, NESPAK has submited CSR in three stages i.e: Pre-Interim, Interim and Final. Pre-Interim CSR was submitted in March, 2008 and after receiving feedback from all the stakeholders Interim CSR was submitted and its enforcement was approved by the AJK Cabinet in its meeting held on August 19, 2009. Additional items of work have been added upon the recommendations of various Departments. The rates used for the preparation of this Composite Schedule of Rates have been updated to the prevailing prices of construction materials, machinery and labour for the month of January 2016 in all ten districts of AJ&K on semi-annual basis.

The CSR-2009 (updated) has been computerized in such a manner that links exist between the basic data file, comprising rates of construction materials, labor and rental of machinery. Furthermore those calculation carried out in files of detailed analysis (Volume-II, A & B) and resulted to modify the files of Composite Schedule of Rates (Volume-I). Any revision initiated in the "basic data" file would correspondingly revise the relevant item rate.

The Schedule consists of two Volumes; namely Composite Schedule and Detailed Analysis for each district of AJ&K. Each page of the CSR bears identification details with respect to its edition, volume and district.

Minor adjustment in the market rates have been made using best professional judgment and using data from our survey of various districts of AJ&K and other cities of Pakistan. The Rate Analysis Section constituted by the Government of AJ&K is deputed to monitor and resolve difficulties that may arise in the application of the rates contained in this schedule to cope with regional imbalances at a given time.

All cost estimates for administrative approval and detailed estimates for technical sanction shall be prepared on the basis of rates provided in the Schedule. This Schedule will form bench mark for inviting tenders for which specific item of works included in the estimate shall be identified for quotation above or below the rates.

The rates for items other than those given in this Schedule shall be treated as non-scheduled items. The analysis of rates for such items shall be prepared by the concerned Executive Engineer and approved by the competent authority (Superintending Engineer) before the work undertaken, keeping in view the provisions of the delegations of the financial powers. Copies of the approved rate analysis shall be forwarded to Rate Analysis Section P&DD for reference and review where-ever found necessary and then incorporation in next updation, if justified. This Schedule of Rates supersedes all previous documents and shall become effective from the date of issuance.



# TABLE OF CONTENTS

- 0. CONSTRUCTION MATERIAL SOURCES STUDY
- 1. CARRIAGE
- 2. LOADING, UN-LOADING AND STACKING
- 3. EARTH WORK
- 4. DISMANTLING (Demolishing)
- 5. PLAIN AND REINFORCED CONCRETE
- 6. PRESTRESSED CONCRETE
- 7. PILE FOUNDATION CONCRETE
- 8. DAMP PROOF COURSE AND WATER PROOFING
- 9. CEMENT CONCRETE BLOCK MASONRY
- 10. BRIDGES
- 11. BRICK WORK
- 12. STONE MASONRY
- 13. ROOFING
- 14. FLOORING
- 15. FINISHING
- 16. WOOD WORK



# TABLE OF CONTENTS

- 17. PAINTING AND VARNISHING
- 18. LINING OF CANALS
- 19. PROTECTION AND DIVERSION WORKS
- 20. OUTLETS
- 21. ROAD AND ROAD STRUCTURES
- 22. SHEET PILING
- 23. PLUMBING, SANITARY INSTALLATIONS AND GAS FITTINGS
- 24. SURFACE DRAINAGE
- 25. SEWERAGE
- 26. SINKING OF WELLS
- 27. TUBEWELL AND WATER SUPPLY
- 28. IRON, STEEL AND ALUMINUM WORKS
- 29. HORTICULTURE
- 30. ELECTRICAL INSTALLATIONS



# GENERAL CONDITIONS

- 1. The work contained in this Schedule of Rates shall be carried out in accordance with the specifications given briefly for each item and the applicable provisions of the West Pakistan Schedule of Rates Committee Specifications as adopted by the Government of AJ&K duly amended from time to time
- 2. The rates entered against all items in the Schedule of Rates are those referred to in contract as the basic rates which cover the cost of all materials, transportation to site of work, labour, equipment, tools, plants, supervision charges, all Government levies, imports, octroi charges, overheads, profits and incidental cost thereto required for the satisfactory completion of the work. Charges for testing the Public Health engineering and Electrical works are also included in this schedule.
- 3. Unless otherwise stipulated, measurements for payment for the work done shall confirm to the specification for the execution of works West Pakistan Standing Rates Committee adopted by the Government of AJ&K.
- 4. For certain items of the work floor-wise rates have been entered in this schedule. For this purpose, the rates for the basement shall be applied to all works below the foundation up to the top of roof of basement. Rates for the ground floor include the cost of all works from the top of the basement roof up to the top of ground floor and so on. Parapet, water tank and stair wall etc. shall be considered as part of the floor above which these are constructed.
- 5. If a discrepancy is found between various documents, the order of precedence given below shall govern to determine the scope of the contracted work forming part of the contract based on this schedule:
  - Schedule of Quantities
  - West Pakistan Standing Rates Committee Specifications as adopted by the Government of AJ&K.
  - Special condition of the agreement
  - Conditions of contract
  - Drawings
- 6. The unit rates of plant, materials and labor given in this schedule are indicative and shall not form bases for a claim by the contractor for the works let out on percentage above or below the composite schedule of items.
- 7. Nominal conversion figures from System International to System Imperial have been given as complete switch over has not yet been achieved.
  - i. Cost of Manpower not charged to the items directly such as Contractor's Head Office, Project Office, Security, Laboratory, Survey, Account, Stone and Administration staff.
  - ii. Expenses on Laboratory, Camp, Workshop, Office and allied equipments and fixtures.
  - iii. Small equipment, tools and attachments.
  - iv. Advance tax deductible at source.



# ABBRIVATIONS USED

	SYSTEM INTERNATIONAL	
R.ft.	Millimeter	mm
Sq.ft.	Centimeter	cm
Cu.ft.	Running Meter	RM
Lb	Square Meter	Sq.m
Oz	Cubic Meter	Cu.m.
Psi	Kilogram	Kg.
Grs	Newton per millimeter square	N/mm <sup>2</sup>
Mnd	Hundred	Hund
Dz		
	Sq.ft. Cu.ft. Lb Oz Psi Grs Mnd	R.ft.MillimeterSq.ft.CentimeterCu.ft.Running MeterLbSquare MeterOzCubic MeterPsiKilogramGrsNewton per millimeter squareMndHundred



	INTO	MULTIPLY BY
LENGTH		
Inch	Millimeter	25.40
Millimeter	Inch	0.0394
Foot	Meter	0.3048
Meter	Foot	3.2808
Yard	Meter	0.9144
Meter	Kilometer	1.6093
Kilometer	Mile	0.6214
Canal Mile (500 feet)	Kilometer	1.524
Kilometer	Canal Mile	0.6562
Girah	Millimeter	57.15
Mile International		
Nautical (6076.12 feet)	Meter	1852.00
Mile UK nautical (6080 feet)	Meter	1853.18
MASS WEIGHT		
Pound	Kilogram	0.4536
Kilogram	Pound	0.2046
Ounce	Gram	28.3495
Gram	Ounce	0.0353
Quintal	Kilogram	100.00
Grain	Milligram	64.7989
Hundred Weight	Kilogram	50.8023
Tonne	Kilogram	1000.00
Ton	Kilogram	1016.047
MASS WEIGHT		
Ton	Tonne	1.0160
Tonne	Ton	0.9842
Seer	Kilogram	0.9331
Maund	Kilogram	37.324
Tola	Gram	11.664
Short Ton (2000 lbs)	Tonne	0.9072



TO CONVERT	INTO	MULTIPLY BY
AREA		
Square Inch	Square Millimeter	645.16
Square millimeter	Square inch	0.0015
Square Foot	Square Meter	0.0929
Square meter	Square foot	10.7639
Square Yard	Square meter	0.8361
Square meter	Square Yard	1.1960
Acre	Square meter	4046.8564
Acre	Hectare	0.4047
Hectare	Acre	2.4787
Hectare	Square meter	10000
Square mile	Square kilometer	2.5899
Square Kilometer	Square mile	0.3861
Square mile	Hectare	258.999
Hectare	Square mile	0.00386
CAPACITY, VOLUME A	ND MODULES OF SECTION	
Pint (UK)	Liter	0.5683
Gallon (imperial)	Liter	4.5461
Cubic foot	Liter	28.3168
	1.14	1000

	Elici	7.0701
Cubic foot	Liter	28.3168
Cubic meter	Liter	1000
Liter	Cubic foot	0.0353
Cubic inch	Millimeter	16.3871
Fluid ounce	Millimeter	28.413
Liter	Gallon (imperial)	0.2199
Cubic Inch	Cubic millimeter	16387.1
Cubic foot	Cubic meter	0.0283
Cubic meter	Cubic foot	35.3147
Cubic Yard	Cubic meter	0.7645
Cubic meter	Cubic yard	1.3080
Acre foot	Hectare meter	0.1233



TO CONVERT	INTO	MULTIPLY BY
VLOCITY AND SPEED		
Foot per second	Meter per second	0.3048
Foot per minute	Meter per second	0.0051
Foot per second	Kilometer per hour	1.0973
Kilometer per hour	Foot per second	0.9113
Mile per hour	Meter per second	0.4470
Kilometer per hour	Mile per hour	0.6214
Mile per hour	Kilometer per hour	1.6093
FORCE		
Kilogram force	Newton	0.8066
Pound force	Newton	4.4482
Ton force	Kilo Newton	9.9640
Newton	Pound force	0.2248
Kilo Newton	Ton force	0.1004

Pound force per foot	Newton per meter	14.5939
----------------------	------------------	---------

### PRESSURE, STRESS AND MODULES OF ELASTICITY (1Pa=1N/m<sup>2)</sup>

Pound per Square foot	Pascals	47.8803
Pound force per square inch	Kilo Pascals	6.8948
Ton force per square inch	Kilo Pascals	107.252
Kilo Pascals	Pound force per square foot	20.8354
Ton force per square inch	Mega pascals	15.4443
Mega Pascals	Pound force per square inch	145.038

#### MASS PER UNIT LENGTH

Pound per foot	Kilogram per meter	1.4882
Kilogram per meter	Pound per foot	0.6720
Ton per mile	Ton per kilometer	0.6313



MASS PER UNIT AREATon per Square mileKilogram per square kilometerPound per square footKilogram per square meterKilogram per square meterPound per square foot	392.298 4.8824 0.2048
Pound per square foot Kilogram per square meter	4.8824
MASS PER UNIT VOLUME	
Pound per Cubic footKilogram per Cubic meterPound per Cubic footGrams per literKilogram per Cubic meterPound per cubic footGrams per LiterPound per cubic foot	16.0185 16.0185 0.06243 0.06243
VOLUME RATE OF FLOW	
Cubic foot per second (cusec)Cubic meter per second (cusec)Cubic foot per second (cusec)Liter per secondGallon per minuteLiter per secondCubic foot per thousand acresLiter per hectareCubic foot per thousand acresCubic meter per square kilomet	28.3168 0.0757 0.0670
FUEL CONSUMPTION	
Gallon per mileLiter per kilometerMile per GallonKilometer per liter	2.825 0.354
MOVEMENT OF FORCE TORQUE	
Pound force footNewton meterPound force inchNewton meterTon force footKilonewton meterTon force inchKilonewton meter	1.3558 0.1130 3.0370 0.2531



	INTO	MULTIPLY BY
SECOND MOMEMT OF AREA		
Inch <sup>4</sup>	Millimeter <sup>4</sup>	416231
PLANE ANGLE		
Degree	Radian	0.0174
WORK, ENERGY, POWER (1J =1Ws)		
Kilowatt hour Foot pound force Horse Power Horse power	Kilo joule Joule Kilowatt Kilogram force meter per sec	3600 1.3558 0.7457 76.0402

\*For exact values, please consult Standard Hand Books



#### 1. Concrete Compressive Strength (Test Table)

Nominal	Minimum cube strength required (in psi)			
Mix	Laborator	Laboratory Tests		Tests
	7 days	28 days	7 days	28 days
1:1:2	4000	6000	3000	4500
1:11/2:3	3350	5000	25000	3750
1:2:4	2700	4000	2000	3000
1:3:6		2500		2000
1:4:8		2000		1500

Ref. AJK Technical & General Specifications Chapter No.05 (Plan & reinforced concrete)Page No.5-10

#### 2. Bricks Compressive Strength (Test Table)

Designation	Average	Max. Water Absorption
	Compressive	% by weight
	strength (lbs/Sq.inch)	
First Class	2000	1/6 <sup>th</sup> of its weight (average weight of ten
		bricks shall not less than 5.5lb (2.5kg)
Second Class	1500	1/4 <sup>th</sup> of its weight
Third Class	1000	
Fourth Class	725	

Ref. AJK Technical & General Specifications Chapter No.11 (Brick Work) Page No.11-2

#### 3. Uniaxial Compressive Strength of Stones (Test Table)

Type of Stone	Weight (lbs/cft) Average	Maximum Water Absorption Percentage by weight	Minimum Compressive Strength kg./sq.cm.
Granite	165	0.5	1000
Basalt	225	0.5	400
Lime Stone (Slab & Tiles)	160	0.15	200
Sand Stone (Slab & Tiles)	140	2.5	300
Marble	170	0.4	500
Quartzite	225	0.4	800
Laterite (Block)		12	35

Ref. AJK Technical & General Specifications Chapter No.12 (Stone Masonry) Page No.12-1



#### **Properties of Steel**

#### A. <u>Dimension Properties:-</u>

Bar Designation	Weight (K.G/Foot)	Diameter	Tolerance on Mass
3	0.170	0.375	±12
4	0.303	0.500	
5	0.477	0.625	
6	0.680	0.750	±9
7	0.930	0.875	
8	1.213	1.000	±6.5
9	1.530	1.128	±6.5
10	1.960	1.270	±6.5
11	2.415	1.410	±4.5
14	3.477	1.693	±4.5
18	6.182	2.257	±4.5

#### B. Physical Properties (ASTM A-615/ A 615M)

Grade	Yie	eld	Ultimate Ter	sile Strength	Elongation Min. %age
Grade	MPa	Psi	MPa	Psi	
40	280	40,000	420	60,000	12
60	420	60,000	620	90,000	9
75	520	74,500	700	1,00,000	6

#### C. <u>Chemical Properties</u>

			Chemical	Composition	% age		
Grade	Min	Carbon	Si		Pota	shium	Sulpher
			Ι	I II		II	
Fe Mn 74C	70-77	7.0	2.0	3.0	0.25	0.38	0.03
Fe Mn 68C	65-72	7.0	2.5	4.5	0.25	0.40	0.03



#### Conversion Table of Lift to Lead

In the case of earthwork measurement where extra lead is to be paid for lift the method will be as follows: The lift will be measured from the centre of gravity of the excavated earth to that of placed earth. This will constitute the mean lift for the section.

When earth has to be carried over a spoil bank and dumped beyond it the mean lift would be the difference in level between the centre of gravity of the excavated earth and the top of the spoil bank omitting the dowel.

#### The equivalent leads for various means lifts are given below:

Lift in Meters	<b>Conversion Factors</b>	Equivalent Horizontal lead in Meters
0.5		4
1.0	8	4 8 15 20 25 36 47 60 75 92 110 130 152 175 200 216 230 243 257
1.5		15
2.0	10	20
2.5		25
3.0		36
3.5		47
4.0		60
4.5		75
5.0	2 28 - 1 10 in Materia	92
5.5	3.28x Lift in Meter+2	110
6.0		130
6.5		152
7.0		175
7.5		200
8.0		216
8.5		230
9.0	27	243
9.5		257
10.0		270

#### Note:

These conservation factors also incorporate allowance for extra lead due to cross lead with a view to ensuring a uniform system. The equivalent lead will be added to the horizontal lead to get the total lead to be paid. The exact site or R.D.s between which extra lead is to be given must be recorded in the first column of detailed measurement in the Measurement Book.

REF. Rates Directorate Coordination and Monitoring Division (Water) WAPDA House Lahore, Section-II Earthwork Excavation and Embankment Page 2-8 WCSR

SWG to	Millimeter	&	Inches	Conversion	Chart

Sr.No.	SWG	mm	Inches
1.	8 SWG	4.064	0.160
2.	10 SWG	3.251	0.128
3.	12 SWG	2.642	0.104
4.	14 SWG	2.032	0.080
5.	16 SWG	1.626	0.064
6.	18 SWG	1.219	0.048
7.	20 SWG	0.914	0.036
8.	22 SWG	0.711	0.028
9.	24 SWG	0.559	0.022
. 10.	26 SWG	0.457	0.018
11.	28 SWG	0.376	0.015
12.	30 SWG	0.315	0.012



	AUGINEUAIES					ROA	ROAD AGGREGATE	EGATE							FINE	FINE AGGREGATES	ATEC	
			and the	A BAS	*Tent	*Tentative Limits	mits				a second						AI ES	
PHYSICAL ENGINEERING PARAMETERS	ASTM C-33 SPECIEICATION	Heavy	avy Traffic Roads†	pads†	Med	Medium Traffic Roads†	0	Light T	Light Traffic Roads†	ads†	OTHSAA	IN THE	E¥.	ASTM LIMITS		Mortar	BS Mortar and Plaster	ter
	LIMITS	bnuodnU IIA	earing Course	suonimuti8 9280-du2/9268	bnuodnU IIA	esnoo gunse	suonimutit 926/du2/926	bnuodnU Ilu	esnog grinse	suonimuti 926/5ub-base	ll type of roads	tuminous Mixes	thement The Aggregate for	Concrete and Mortar	ssonry Mortar	or Screed	gunabnaß lama	prinetering
Specific Gravity (not less than)	. 2.5				,			7	~		V		ы		≥M	ыन	EX	Gyl
Water Absorption (not more than. %)	1																	
Sodium Sulfate Soundness (max. %)	12																	
Los Angeles Abrasion Value (max. %)	50	36	36									12						
Materials Passing (No.200 sieve) (% by	6	53	63	05	30	30	35	35	30	35.		30 3	35					
Shale (% by wt.)	1												3					
Clay Lumps and Friable Particles (% by wt.)	2																	
Other Deleterious Substances (% by wt.)	1												,		+			
Impact Value (max.)		23	23	30	27	27	30	30	27	30		36						
Crushing Value (max.)		23	23	30	27	30	-	30	27	30		25						-
10% Fine Value kN (min.) Dry		130	130	100	115	100	100		115	100	150	110						
10% Fine Value kN (min.) Soaked		80	65	50	65	65			65	50		-						
Flakiness (max.)												45 35						
Sand Grading													ASTM		BS- B	BS-112	BS-	BS-
Fineness Modulus													ASTM C-33			-	-	PALL
Mortar Bar Expansion % (max.) at 14 days (ASTM 1260)	0.1												0.1					
Bitumen Adhesion (Not less than)											95	75						-



P.C	AZAD GOVERNMENT OF THE STATE OF PLANNING & DEVELOPMENT DEPARTM	
L'RO Y	(Rate Analysis Section M & H Win	
-	No. Pⅅ/CSR & RA/ 24 - 68 /2012	Dated: January 23, 2012
1	The Secretary Works/ Communication	
2	The Secretary Physical Planning & Housing	
3	The Secretary Agriculture/ Animal Husbandry	
4	The Secretary Tourism/ Information/ Wildlife/ Fisheries	Govt. of AJ&K, Muzaffarabad
5	The Secretary Local Government & Rural Development	Covi. of AJ&K, Muzartarabab
6	The Secretary Electricity/ Hydro Electric Board/ Private Power Cell	
7	The Secretary Education (Colleges)	
8	The Secretary Education (Schools)	
0	The Secretary Sports/ Culture/ Youth/ Transport The Secretary SERRA	

Sir.

I am directed to refer the circular/letter No. /P&DD/Admin/7778-7830/209 dated September 15, 2009 and to submit that the earth work specifications for excavation in soil, hard strata and hard rocks have been completed, which are now uploaded on P&DD website www.pndajk.gov.pk. The said specifications can be easily downloaded for calculation of earth work item involved in all development projects.

For further query/ information and valuable comments (within two weeks) please feel free to contact this office.

(Engr. Altaf Ahmad)

Govt of A!&K, MuzalTarabad

Chief Rate Analysis Section.

#### Copy to:

8.

- 1. PS to the Additional Chief Secretary (Dev.)
- PS to the Secretary Planning & Development Department
- 3. PA to the Director General (M&E), P&DD
- 4. The Chief Engineer PWD (Buildings/ PHE), South
- 5. The Chief Engineer PWD (Buildings/ PHE), North
- The Chief Engineer PWD (Highways), South 6.
- The Chief Engineer PWD (Highways). North 7.
  - The Chief Engineer Sudai Kawait Development Fund
- 5) The Director General CDO
- 10. The Director General, water resources/ Irrigation, Agri. Deptt.

Continue Page No. 2

Ph. 05822-924117

Fax. (05822)-921006-921687

E-mail: chief.ra@pndaik.gov.pk

www.pndajk.gov.pk F: / Nisar's / CSR Letter pad



#### -11 1/3 **Excavation & Grading of Rocks.** A. EXCAVATION METHODS FOR ROCK Methods relates to rock strength and fracture density. Direct excavation: possible in fractured rock and in all soils; using face shovel, backhoe, clam . shell grab or dragline Ripping: needed to break up slightly stronger rock, using tractor-mounted ripper, or breaking with boom-mounted hydraulic pick (pecker). Blasting: generally required in stronger, less fractured rock. Rock is lossened in the ground by undercharged blasting in some quarries; on urban sites can be broken by hand-held pneumatic drill or by pecker. Massive rock of moderate or high strength needs to be fractured normally by blasting; where blasting is unacceptable, breaking by pecker or hydraulic breaker is very slow. "Annex - A Fig. 2" shows the excavation type and ranges with respect to UCS and Fracture spacing. B. CUT SLOPES IN ROCK Sound rock can be cut to vertical faces; normally raked back by 10° and benched at 10 m intervals to improve safety. Inclined fractures are main hazard, notably dipping 30-70<sup>9</sup> Dips > 50<sup>6</sup> normally required cutting face back to clean bedding or fracture. Shale beds may weather and undercut slopes in strong sandstone or limestone. Hillside excavations may undercut unstable weathered rock, old landslides or soliflucted head. Annex - "A" Fig. 1 shows the ranges of stable cutting slopes in rocks and soil. CUT SLOPES IN CLAY C. Drainage changes stability over time where face is cut into clay with initial water table near the surface. A. Excavation permits stress relief, pore water pressure (pwp) decreases. B. Pwp rises to regain equilibrium (drained state); strength and stability therefore decrease. C. Slope ultimately drains (or is artificially drained) to new lower water table; reduced pwp then increases stability. D. Premature failure occurs where stability is due to temporary pore water suction; failure may be in minutes or hours so faces are battered back for longer safety. Clay, Unweathered, may cut to 65 slopes to 8 m high where small slips can be tolerated. Stiff glacial till may stand close to vertical for some months at less than critical height, so retaining walls can be built in front. Weep horizons on sand layers cause instability. Lateral stress relief in slopes cut in over consolidated clay may cause outward movement. Settlement adjacent to stable cut slope may be 1-2% of excavation depth. Critical height, H Material Cohesion **Un-fissured** Fissured 25 KPa 5 m 3 m Firm Clay 50 кРа 10 m 6 m Stiff tile 12 KPa 24 m Values for typical fissure depth = z = 1.5 c/yThen Sn. tArt. 3 AV Awais Ahmed Engr. Altaf Ahmed Geologist Chief Rate Analysis Section **Rate Analysis Section** Ph. 05822-924117 P&D Department (AJK) P&D Department (AJK)



		Pa	e2/3		
	Exc	cavation and stren	gth properties of	of rocks	
Grade	Material /rock type and name	UCS (unconfined compressive strength) MPa	Density dry t/m3	Field Properties of Rocks	Work type
1	Coal	2-100	1.4	Crumble under blolws break with hammer and hand.	Pick work/ Jumper work
	Gypsum	20-30	2.2	Dent by finger nail white in col	Jumper work
	Salt	5-20	2.1	show cubical cleavage ductile deformation in stress	Jumper work
	Clay (Cretoceous)	1-4	1.8	Mold by fingers, break by hammer if compacted	Pick work
П	Musdtone (Carboniferous)	10-50	2.3	Break by hammer crumble	Jumper work/
	Shale (Carboniferous)	05-30	2.3	under pick blows. Break by	Pick work/ Jumper work
	Chalk (Cretoceous)	05-30	1.8	hand.	Jumper work
	Limestone (Carboniferous)	50-150	2.6	moderately strong rock,	Jumper work/
	Dolomite	50-150	2.5	break by hammer lime stone.	Blasting work
V	Gneiss	50-200	2.7	Strong rock break by hammer	Jumper work/
	Marble	50-200	2.6	moderately strong rock,	
	Schist	20-100	2.7	break by hammer	
	Slate	20-250	2.7	Ripping needs to break.	Blasting work
V	Sandstone (Graywacke)	100-200	2.6	Blasting generally required to	Blasting work/ Chiseling
1	Conglomerate	variable	variable	Ripping and blasting required	Jumper work/
	weathered sandstone	5-40	1.9	if cemented conglomerate.	Blasting work
VI	Granite	50-350	2.7	Blasting, Chisling and ripping	Blasting
	Basalt	100-350	2.9	required to break, very strong to strong rocks. Mostly rocks	A REPORT OF THE REPORT
	Quartzite	100-350	2.7	are igneous and metamorphic	

SOURCE Foundations of Engineering Geological 2/ed. By TONY WALTAAM, Civil Engineering Department, Nattingham Trent University, UK. NOTES:

1 Selection of P/W, J/W, B/W and C/W depends upon the cementing material and matrix of the rock specially in the sedimentory rock. Fracture in stronger rocks occurs along the fault zone. In this case hard rock may be excavted by J/W, rather than B/W, see Fig. 2. Annex A


2 Accurate confirmation is the job of Geologist/ Material Engineer after inspectiong of the site.

1htnon Awais Ahmed


Geologist Rate Analysis Section P&D Department AJ&K

Ht J- A Jonal. Engr. Altaf Ahmed Chief Rate Analysis Section 23/01/2012

Ph. 05822-924117 P&D Department AJ&K





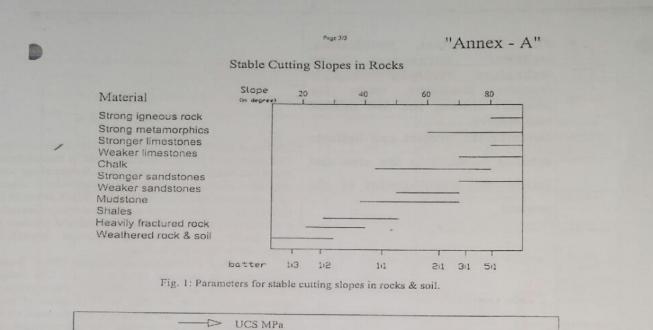

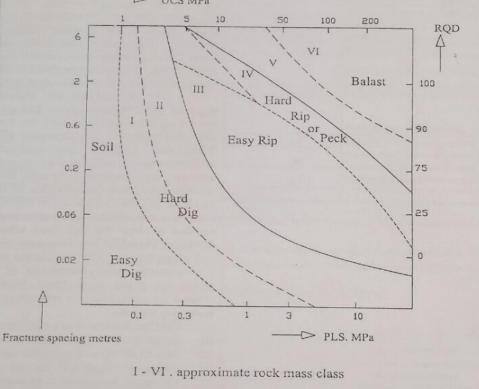


Fig. 2: Diagram shows ranges of different material with respect to UCS fracture spacing.

Foundations of Engineering Geological 2/ed. By TONY WALTAAM, Civil Engineering Department, Natingham Trent University, UK.

Engr. Ishfaq Ba Research Officer

1mg m Awais Ahmed Geologist

24 Imul . Engr. Altaf Ahmed

Chief R.A. Section P&DD 23/01/2012



S.No	Name of Source	Rock Name	Location of Deposit	Estimated Reserve	Remarks	District
1.	Khurshidabad Limestone	limestone	Khurshidabad Village	15.0 million M <sup>3</sup>	All type of concrete work	Kahuta
2.	Khurshidabad Dolorite	Dolorite	Khurshidabad Village	4.0 million M <sup>3</sup>		
3.	Palangi Nullah Gravel	Gravel	Palangi	L/S	Only for	
4.	Tangari Battar River Gravel		Battar	Under prospection	marginal use concrete	
5.	Malal Bagla sandstone	Sandstone	Malal Bagla	6.0 million M <sup>3</sup>	(2000psi strength) with	Bagh
6.	DanaSandstone		Dana	8.0 million M <sup>3</sup>	OPC	
7.	Chamankot sandstone		Chaman Kot	12.0 million M <sup>3</sup>		
8.	Bess Bagla sandstone		Bess Bagla	12.0 million $M^3$		
9.	Dhulli Sandstone		Sandstone	6.0 million M <sup>3</sup>		
10.	Shujahabad sandstone		Shujaabad	10.0 million M <sup>3</sup>		
11.	Patraita Sandstone		Patriata	3.0 million M <sup>3</sup>		
12.	Lassdanna Sandstone		Lassdanna	20.0 million M <sup>3</sup>		
13.	Yadgar limestone	Limestone	Yadgar	$25.50 \text{ million } M^3$	All type of	
14.			Batmang		concrete work With Project	
15.			Hill Seri Dara	Under prospection	Specific studies	
16.	-		Zahid Chowk Pirchinasi road	Under prospection		
17.	Noseri Dolorite	Dolorite	Noseri Chelhana	7.0 million M <sup>3</sup>		
18.	Lamnian Dolerite	Dolorite	Lamnian	-		_
19.	Eran Sandstone	Sandstone	Near Kohala	Under prospection	Only for marginal use	Muzaffarabad/ Hattian
20.	Chattar Kalas sandstone gravels	Gravel	Agar Naullah Chattar Kalas	Under prospection	concrete (upto 2000psi strength) with	bad/ H
21.	Komikot sandstone	Sandstone	Komikot	Under prospection	OPC	affara
22.	Niazpura Dolomitic Limestone	Limestone	Niazpura	5.0 M <sup>3</sup>	All type of concrete work With Project Specific studies	Muz
23.	Lamnian Meta Basalt	Igneous Bodies	Lamnian	7.0 M <sup>3</sup>	All type of Concrete work Except High Strength Concrete (upto 2000psi And Asphalt Layer	

#### Recommended Construction Material Sources located in ten Districts & Around AJ&K



25.  Kamroti Dolomite  Koti Nakial road  30.0 million M <sup>3</sup> 30.0 million M <sup>3</sup> seccific study seccific st	24.	Goi Dandli	Dolomite	Kotli Goi Dandli	Abundant	All type of	Kotli
2.5.  Number Doome  Rom Frankin Road  Job Minford M  specific strategy stress concrete Only for marginal use concrete (upb 2000 paid strength) with    2.6.  Poonch fraver gravel  Gravel  Distributed along Rive terraces  L/S  Only for marginal use concrete (upb 2000 paid strength) with    2.7.  Poonch fraveraces  Gravel  Khari Sharif  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  Mirpur    30.  Mangla jatli road  Gravel  Khari Sharif  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  Mirpur    31.  Jeri Kas  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  Mirpur    32.  Skater  Skater Naullah  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  Mirpur    33.  Kanali Kas  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  Mirpur    34.  Kot Sarsawa  Under prospection  Only for marginal use concrete (upb 2000 paid strength) with  All type of concrete with with Oric    35.  Hari Kas  Under prospection  Dudar  Only for marginal use concrete (upb 2000 paid strength) with    36.  Chaprian  Under prospection  Marginal use concrete (upb 2000 paid strength) with    37.		K (D.1.)				concrete work	
26.  Poonch river gravel  Gravel  Distributed along  L/S  Only formarinal use concrete (upo 2000 ps) strength) with OPC    27.  Poonch terraces do-  L/S  Outpy of the concrete (upo 2000 ps) strength) with OPC  Outpy of the concrete (upo 2000 ps) strength) with OPC    28.  Khari Sharief  Gravel  Khari Sharief  Under prospection  Only for marginal use concrete (upo 2000 ps) strength) with OPC  Only for marginal use concrete (upo 2000 ps) strength) with OPC    30.  Mangla jatli road  Jeri Kas  Under prospection  OPC  OPC    31.  Jeri Kas  Jeri Kas  Under prospection  OPC  OPC    33.  Kanali Kas  Jeri Kas  Under prospection  OPC  OPC    34.  Kot Sarsawa  Under prospection  OPC  OPC  OPC    35.  Hari Kas  Under prospection  Output for marginal use concrete (upo 2000 ps) strength) with OPC  OPC    36.  Panjari Nullah  Gravel  Panjari  Under prospection  OPC    38.  Chaprian  Under  Prospection  OPC  OPC    39.  Bakot Kas  Metaasalt  Noseri -Marbino M <sup>3</sup> All type of concrete with OPC    41.  Noseri Dolorite  Metaasalt  Sandor  Under prospection<	25.	Kamroti Dolomite		Kotli Nakial road	30.0 million M <sup>3</sup>		
26.  Poonch river gravel  Gravel  Distributed along Rive terraces  L/S  Outp for marginal use concrete (upto 2000 psi strongh) with Out    27.  Poonch terraces  L/S  Outp for marginal use concrete (upto 2000 psi strongh) with Out    28.  Khari Sharief  Gravel  Khari Shariif  Under prospection  Outp for marginal use concrete (upto 2000 psi strongh) with OPC  Mirpur    30.  Mangla juli road  Mangla  Under prospection  Outp for marginal use concrete (upto 2000 psi strongh) with OPC  Mirpur    31.  Ieri Kas  Under prospection  Under prospection  Outp for marginal use concrete (upto 2000 psi strongh) with OPC  Mirpur    33.  Kanter  Skater  Nater Naullah  Under prospection  Only for marginal use concrete (upto 2000 psi strongh) with OPC  Mirpur    34.  Kot Sarsawa  Under prospection  Only for marginal use concrete (upto 2000 psi strongh) with OPC  Mitp or marginal use concrete (upto 2000 psi strongh) with OPC  Mitp or marginal use concrete (upto 2000 psi strongh) with OPC    35.  Hari Kas  Under prospection  Only for marginal use oPC  Mitp or concrete work With Project    36.  Panjari  Under prospection  Only for marginal use oPC  Mitp or concrete work With Project    37.  Dandhar Nullah  Gravite  Nelum Yater Negati  All type						except Pre-	
Pronch terraces      Rive terraces      mergen dom        28.      Khorban Nullah gravel      -do-      L/S      concrete (up) opis) strength) with opposite        29.      Khari Sharicf      Gravel      Khari Sharif      Under prospection      Only for marginal use concrete (up) opis) strength) with opposite      Mirpur        30.      Mangla jati road      Jeri Kas      Under prospection      Only for marginal use concrete (up) opis) strength) with opposite      Only for marginal use concrete (up) opis) strength) with opposite      Mirpur        31.      Jeri Kas      Under prospection      Skater Naullah      Under prospection      OPC      OPC      Difference      Mirpur        33.      Kanali Kas      Under prospection      There prospection      OPC      Difference      Mirpur        34.      Kot Sarsawa      Under prospection      Onler prospection      OPI for marginal use concrete (up) op optis      Strength) with OPC      Strength) with OPC      Strength) with OPC      Strength) with OPC      Strength with OPC			~ 1				
27.    Poonch terraces      28.    Khorban Nullah gravel   do-    L/S    concrete (upto strength) with OD option      29.    Khari Sharicf    Gravel    Khari Sharif    Under prospection    Only for marginal use concrete (upto 2000 psi strength) with OD    Mirpur      30.    Mangla jatli road    Jeri Kas    Under prospection    Only for marginal use prospection    Only for marginal use concrete (upto 2000 psi strength) with OD    Only for marginal use prospection    Only for marginal use prospection    Mirpur      31.    Jeri Kas    Under prospection    Only for marginal use prospection    Only for marginal use prospection    Mirpur      34.    Kot Sarsawa    Under prospection    Only for marginal use prospection    Mirpur      35.    Hari Kas    Under prospection    Only for marginal use prospection    Mirpur      36.    Panjari Nullah    Gravel    Panjari    Under prospection    Only for marginal use prospection    Mirpur      37.    Dandhar Nullah    Gravel    Panjari    Under prospection    Only for marginal use with OC    Mibotatabad      40.    Bakot Kas    Metaasalt    Neelum Valley    I.5 million M <sup>3</sup> Stone Masonry stress concrete work	26.	Poonch river gravel	Gravel		L/S		
21.  Khorbarn Nullah gravel  adot  1.00  200  prospection    29.  Khari Sharief  Gravel  Khari Sharif  Under prospection  Only for moraret (upto 2000 psi strength) with OPC  Only for moraret (upto 2000 psi strength) with OPC  Mirpur    30.  Mangla jatli road  Mangla  Under prospection  Only for moraret (upto 2000 psi strength) with OPC  Mirpur    31.  Jeri Kas  Under prospection  Skater  Under prospection  Only for moraret (upto 2000 psi strength) with OPC  Mirpur    32.  Skater  Skater  Under prospection  Only for prospection  Mirpur    33.  Kanali Kas  Under prospection  Only for prospection  Mirpur    34.  Kot Sarsawa  Under prospection  Only for prospection  Mirpur    35.  Hari Kas  Under prospection  Only for prospection  Mirpur    36.  Panjari Nullah  Gravel  Panjari  Under prospection  Only for prospection    38.  Chaprian  Chaprian  Under prospection  State Statides  Mibitar    41.  Noseri Polorite  Dolorite  Neelum Valley Noseri - Marble  Statufor  Statufor Statufor    44.  Neelum Granite Keran  Granite  Sandoq Natirgan along Neclann	27	Poonch terraces			L/S		
29.  Khari Sharief  Gravel  Khari Sharif  Under prospection  Strength with OVF  Mirpur    30.  Mangla jatli road  Gravel  Khari Sharif  Under prospection  ONF for more singula use concrete (upto 2000 pri strength) with OC  Mirpur    31.  Jeri Kas  Under  Door prospection  ONF for prospection  ONF for prospection  Mirpur    32.  Skater  Skater  Under  Door prospection  ONF for prospection  Mirpur    33.  Kanali Kas  Under  Drospection  Only for prospection  Mirpur    34.  Kot Sarsawa  Under  Donly for prospection  Mirpur    35.  Hari Kas  Under  Only for prospection  Mirpur    36.  Panjari Nullah  Gravel  Panjari  Under    37.  Dandhar Nullah  Gravel  Panjari  Under    38.  Chaprian  Immestore  Bakot  30.0 million M <sup>3</sup> Mittype of concrete work With Project    40.  Bakot Kas  Dolorite  Neelum Valley  1.5 million M <sup>3</sup> Stone Masoury with OPC    41.  Noseri volcanics  Metabasalt Kharigam  Metacarbonates  MT Bazar  1.656 million M <sup>3</sup> Bitumen, plain Concrete work with DPC    44.						2000 psi	
29.  Khari Shariel  Under prospection  Only for marginal use prospection  Mirpur    30.  Mangla jatli road  Mangla  Under prospection  Only for marginal use prospection  Only for marginal use prospection  Mirpur    31.  Jeri Kas  Under prospection  Under prospection  OPC  Starengh) with  OPC    32.  Skater  Skater  Skater Naullah  Under prospection  OPC  Imaginal use prospection  Ima	20.	Kilorbali Nullali graver		00	L/ 5		
30.    Mangla jatil road    Mangla    Under prospection    concrete (upto 2000 psi strength) with OPC      31.    Jeri Kas    Jeri Kas    Under prospection    strength) with OPC      32.    Skater    Skater Naullah    Under prospection    with OPC      33.    Kanali Kas    Under prospection    with OPC    with OPC      34.    Kot Sarsawa    Under prospection    with OPC    with OPC      35.    Hari Kas    Under prospection    Margia use or prospection    only for marginal use or prospection    only for marginal use or prospection    Mit were were were were were were were wer	29.	Khari Sharief	Gravel	Khari Sharif	Under		Mirpur
30.    Margia jathi road    Margia    Under prospection    2000 psi strengthy with OPC      31.    Jeri Kas    Under prospection    Skater    Under prospection    Strengthy with OPC      32.    Skater    Skater    Under prospection    Under prospection    Imagia    Under prospection    Imagia    OPC      33.    Kanali Kas    Under prospection    Kot Sarsawa    Under prospection    Imagia    Imag					prospection		
Image: constraint of the section o	30.	Mangla jatli road		Mangla	Under		
31.    Jeri Kas    Jeri Kas    Under prospection    OPC      32.    Skater    Skater    Skater Naullah    Under prospection    Mark    Mark      33.    Kanali Kas    Under prospection    Duder prospection    Mark    M							
32.    Skater    prospection    prospection      33.    Kanali Kas    Skater Naullah    Under    prospection      34.    Kot Sarsawa    Under    prospection    Image: prospection    Image: prospection      35.    Hari Kas    Under    prospection    Image: prospection	31	Jeri Kas		Ieri Kas			
32.    Skater      33.    Kanali Kas    Skater Naullah    Under prospection prospection      34.    Kot Sarsawa    Under prospection    Image: prospection prospection      35.    Hari Kas    Under prospection    Image: prospection prospection    Image: prospection prospection      36.    Panjari Nullah    Gravel    Panjari    Under prospection    Only for marginal use prospection    Bhimber      37.    Dandhar Nullah    Gravel    Panjari    Under prospection    Only for marginal use prospection    Bhimber      38.    Chaprian    Under prospection    Onder prospection    Secific studies    All type of concrete (upto 2000 pis) strength) with OPC      40.    Bakot Nathia-Gali    limestone    Bakot    Solo million M <sup>3</sup> All type of concrete work with OPC      41.    Noseri Volcanics    Metabasalt    Road along Noseri - Marble    9.03 million M <sup>3</sup> Bitumen, plain Ocacrete but not for prospection    Mabottabad      44.    Neelum Granite Keran    Granite    Danjar - Keran    Under prospection    Bitumen, plain Ocacrete but not for prestress concrete but not	51.	Jell Rus		Jen Kus			
33.    Kanali Kas    prospection    Marking prospection    Marking prospection      34.    Kot Sarsawa    Under prospection    Marking prospection	32	Skotor		Skatar Naullah		410.	
33.    Kanali Kas    Under prospection    Under prospection      34.    Kot Sarsawa    Under prospection    Hari Kas    Under prospection    Hari Kas    Under prospection      35.    Hari Kas    Under prospection    Only for marginal use concrete (upto 2000 psi strength) with    Only for marginal use concrete (upto 2000 psi strength) with    Bhimber      37.    Dandar Nullah    Gravel    Panjari    Under prospection    Only for marginal use prospection    Marginal use concrete (upto 2000 psi strength) with OPC    All type of concrete work with Project    Abbotatabad      40.    Bakot Kas    Imestone    Bakot    30.0 million M <sup>3</sup> All type of concrete work with OPC    Abbotatabad      41.    Noseri volcanics    Metabasalt    Noseri - Marble    9.03 million M <sup>3</sup> marginal use with OPC    Abbotatabad      43.    Islampur-Jura Granite    Granite    Sandoq- Islampura    Under prospection    Stone Masonry prospection    Stone Masonry stress concrete    Stone Masonry with OPC      44.    Neelum Granite Keran Carbonates    Dolorite    Between Khawaja Seri and Kharigam along Neelum Valley    13.5 million M <sup>3</sup> Bitumen, plain concrete work With Project      46.    Malik Seri Dolorite dykes <td< td=""><td>52.</td><td>Skalei</td><td></td><td>Skatel Inauliali</td><td></td><td>Alge?</td><td></td></td<>	52.	Skalei		Skatel Inauliali		Alge?	
34.    Kot Sarsawa    prospection    prospection <t< td=""><td>22</td><td>Kanal' Kan</td><td></td><td>V</td><td></td><td>1.12</td><td></td></t<>	22	Kanal' Kan		V		1.12	
34.    Kot Sarsawa    Kot Sarsawa    Under prospection    Inder prospection      35.    Hari Kas    Under prospection    Inder prospection    Inder prospection <td< td=""><td>55.</td><td>Kanali Kas</td><td></td><td>Kanali Kas</td><td></td><td>200</td><td></td></td<>	55.	Kanali Kas		Kanali Kas		200	
35.Hari KasprospectionThe formation of the prospection36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with37.Dandhar NullahDandarUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with38.ChaprianChaprianUnder prospectionOrec39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project40.Bakot KasNoseri DoloriteDoloriteNeelum Valley Noseri volcanics1.5 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteDanjar - Keran DudnialUnder prospectionStone Masonry44.Neelum Granite Keran CarbonatesMetacarbonatesMT Bazar DudnialI.656 million M³Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteRetween Khawaja Seri and Kharigam along Neelum Valley1.3.5 million M³Bitumen, plain Concrete but not for pre- stress concrete47.Kel Dolorite dykesDoloriteKelser - Kel Road Leser - Kel RoadUnder prospectionAll type of concrete work With Project48.Changan MetaDoloriteChangan - I.1776 million M³All type of concrete work With Project48.Changan MetaDoloriteChangan - I.1776 million M³All type of concrete work With Project	2.1	W. G				1.0	
35.    Hari Kas    Under prospection    Only for prospection      36.    Panjari Nullah    Gravel    Panjari    Under prospection    Only for or prospection    Miniber      37.    Dandhar Nullah    Gravel    Panjari    Under prospection    Only for or maginal use concrete (upto 2000 psi strength) with OPC    Bhimber      38.    Chaprian    Under prospection    Dandar    Under prospection    Milit Strength) with OPC    OPC    All type of concrete work With Project Specific strength) with OPC    Abbottatabad      40.    Bakot Kas    Noseri Dolorite    Dolorite    Neelum Valley Road along Noseri - Marble    1.5 million M <sup>3</sup> studies    Abbottatabad      42.    Noseri volcanics    Metabasalt    Stone Masonry Islampura    Stone Masonry prospection    Stone Masonry    Stone Masonry      43.    Islampur-Jura Granite    Granite    Sandoq-Islampura    Under prospection    Stone Masonry    Stone Masonry    Stone Masonry      45.    Dudhnial Arenaceous Carbonates    Metacarbonates    MT Bazar Dudhnial    1.656 million M <sup>3</sup> Bitumen, plain concrete but not for prestress concrete work With Project Specific	34.	Kot Sarsawa		Kot Sarsawa		1 27	
36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCBhimber37.Dandhar NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCBhimber38.ChaprianChaprianUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCAll type of concrete work With Project SpecificAbbotatabad Abbotatabad40.Bakot KasIslampur-Jura GraniteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite Keran CarbonatesGraniteSandoq- IslampuraUnder prospectionStone Masonry stress concrete but not for pre- stress concrete45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M3 IslampinaBitumen, plain concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteKelser - Kel Road Kharigam along Neelum ValleyAll type of concrete work With Project47.Kel Dolorite dykesDoloriteKelser - Kel Road Changan - I 1.776 million M3All type of concrete work With Project Specific48.Changan MetaDoloriteChangan - Changan -I.776 million M3 <t< td=""><td></td><td></td><td></td><td></td><td></td><td>9 - 7</td><td></td></t<>						9 - 7	
36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCBhimber37.Dandhar NullahDandarUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCBhimber38.ChaprianChaprianUnder prospectionOPCAll type of concrete work With Project Specific39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work with Project SpecificAbbottatabad Abbottabad40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³Marginal use with OPC42.Noseri volcanicsMetabasaltSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - Keran DudnialUnder prospectionBitumen, plain Concrete but not for pre- stress concrete45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudnial1.656 million M³ Seri and Kharigam along Neelum ValleyBitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteKelser - Kel Road Concrete Work SecificAll type of concrete work With Project Specifion47.Kel Dolorite dykesDoloriteKelser - Kel Road Changan -Under prospecionAll type of concrete work With Project Specifio48.Changan Meta <t< td=""><td>35.</td><td>Hari Kas</td><td></td><td>Hari Kas</td><td></td><td></td><td></td></t<>	35.	Hari Kas		Hari Kas			
37.Dandhar NullahDandarprospectionmarginal use concrete (upb 2000 ps) strength) with OPC38.ChaprianChaprianUnder prospection2000 psi strength) with OPC39.Bakot Nathia-GalilimestoneBakot30.0 million M3All type of concrete work with Project Specific40.Bakot KasNoseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3Mattiaes41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble9.03 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq-IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionBitumen, plain Concrete but not for pre-stress concrete but Narigam along Neelum Valley1.5.5 million M3Bitumen, plain Concrete but not for pre-stress concrete but Narigam along Neelum Valley46.Malik Seri DoloriteDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley1.3.5 million M3Bitumen, plain Concrete but not for pre-stress concrete but Narigam along Neelum Valley47.Kel Dolorite dykesDoloriteKelser - Kel RoadUnder prospectionAll type of concrete work With Project Stress concrete work With Project Specific48.Changan MetaDoloriteChangan - 1.776 million M3All type of concrete work With Project Specific <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
37.Dandhar NullahDandarUnder prospectionconcrete (upto 2000 psi strength) with OPC38.ChaprianChaprianUnder prospectionconcrete (upto 2000 psi strength) with OPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbotatabad Abbotatabad40.Bakot KasNoseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasaltNeelum Valley Road along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite Keran CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M³Bitumen, plain Concrete but not for pre- stress concrete45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Neelum Valley13.5 million M³Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seci and Kharigam along Neelum Valley1.5.76 million M³All type of concrete work With Project Specific47.Kel Dolorite dykesDoloriteChangan - Lororite Kharigam along Neelum Valley1.776 million M³All type of concrete work With Project Specific48.Changan MetaDoloriteChangan - Loro	36.	Panjari Nullah	Gravel	Panjari			Bhimber
37.    Dahular Nuhan    Image: Standar							
38.ChaprianChaprianUnder prospectionstrength with OPCAbbottatabad Abbottatabad39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbottatabad Abbottatabad40.Bakot KasDoloriteNeelum Valley Road along Noseri volcanics1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasaltSandoq- Islampura9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - Keran DudhnialUnder prospectionBitumen, plain Concrete but not for pre- stress concrete45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial13.5 million M³Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M³All type of concrete work With Project Specific47.Kel Dolorite dykesDoloriteKelser - Kel Road DoloriteUnder prospectionAll type of concrete work With Project Specific48.Changan MetaDoloriteChangan - Lorite1.776 million M³All type of concrete work With Project Specific	37.	Dandhar Nullah		Dandar			
Image: Section of the section of th					prospection		
39.Bakot Nathia-GalilimestoneBakot30.0 million M3All type of concrete work With Project SpecificAbbotatabad40.Bakot Kas00loriteNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPCAbbottabad41.Noseri volcanicsMetabasaltNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPCAbbottabad43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone MasonryStone Masonry44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionBitumen, plain Concrete but not for pre- stress concreteBitumen, plain Concrete but not for pre- stress concreteMalk Seri Dolorite KharigamBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M3Bitumen, plain Concrete work With Project SpecificAll type of concrete work With Project Stress concrete47.Kel Dolorite dykesDoloriteKelser - Kel Road Changan MetaUnder prospectionAll type of concrete work With Project Specific48.Changan MetaDoloriteChangan - L1.776 million M3All type of concrete work With Project Specific	38.	Chaprian		Chaprian		OPC	
Image: state s					prospection		
40.Bakot KasWith Project Specific studiesWith Project Specific studiesAbbottabad41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPC42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionStone Masonry prospection45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M3Bitumen, plain not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M3All type of concrete work With Project Specific47.Kel Dolorite dykesDoloriteKelser - Kel Road Under prospectionUnder prospectionAll type of concrete work With Project Specific48.Changan MetaDoloriteChangan - the the the trane diagonal prospection1.776 million M3All type of concrete work With Project Specific	39.	Bakot Nathia-Gali	limestone	Bakot	30.0 million M <sup>3</sup>		
40.Bakot KasImage: Construct of the sector of the se							Abbotatabad
41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3studies42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionStone Masonry prospection45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M3Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M3All type of concrete work With Project47.Kel Dolorite dykesDoloriteKelser - Kel Road DoloriteUnder prospectionAll type of concrete work With Project Specific48.Changan MetaDoloriteChangan - Linito in dia1.776 million M3All type of concrete work With Project Specific	40	Bakot Kas					
42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionStone Masonry45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M³Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M³Bitupe of concrete work With Project47.Kel Dolorite dykesDoloriteKelser - Kel Road Changan MetaUnder prospectionAll type of concrete work With Project48.Changan MetaDoloriteChangan - Changan - Lorite1.776 million M³Specific			Dolorite	Neelum Valley	$1.5 \text{ million } M^3$		Abbottabad
42.    Noseri - Marble    9.03 minion Mr    magnar use with OPC      43.    Islampur-Jura Granite    Granite    Sandoq- Islampura    Under prospection      44.    Neelum Granite Keran    Granite    Danjar - Keran    Under prospection      45.    Dudhnial Arenaceous Carbonates    Metacarbonates    MT Bazar Dudhnial    1.656 million M <sup>3</sup> Bitumen, plain Concrete but not for pre- stress concrete    Concrete but not for pre- stress concrete    Stress concrete    Malik Seri Dolorite    Dolorite    Between Khawaja Seri and Kharigam along Neelum Valley    13.5 million M <sup>3</sup> Bitupe of concrete work With Project Specific      47.    Kel Dolorite dykes    Dolorite    Kelser - Kel Road    Under prospection    All type of concrete work With Project Specific      48.    Changan Meta    Dolorite    Changan - 1.776 million M <sup>3</sup> Specific				•			
43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionStone Masonry prospection45.Dudhnial Arenaceous CarbonatesMetacarbonatesMT Bazar Dudhnial1.656 million M³Bitumen, plain Concrete but not for pre- stress concrete46.Malik Seri Dolorite KharigamDoloriteBetween Khawaja Seri and Kharigam along Neelum Valley13.5 million M³Bitumen, plain Concrete but not for pre- stress concrete47.Kel Dolorite dykesDoloriteKelser - Kel RoadUnder prospectionAll type of concrete work With Project48.Changan MetaDoloriteChangan - Dolorite1.776 million M³Strein M³ prospection	42.	Noseri volcanics	Metabasalt		$9.03 \text{ million M}^3$		
Image: A stand of the stand	12	Islampur Jure Granita	Granita		Under		
44.    Neelum Granite Keran    Granite    Danjar - Keran    Under prospection      45.    Dudhnial Arenaceous Carbonates    Metacarbonates    MT Bazar Dudhnial    1.656 million M <sup>3</sup> Bitumen, plain Concrete but not for pre-stress concrete      46.    Malik Seri Dolorite Kharigam    Dolorite    Between Khawaja Seri and Kharigam along Neelum Valley    13.5 million M <sup>3</sup> Bitumen, plain Concrete but not for pre-stress concrete      47.    Kel Dolorite dykes    Dolorite    Kelser - Kel Road    Under prospection    All type of concrete work With Project Specific      48.    Changan Meta    Dolorite    Changan - I.776 million M <sup>3</sup> Specific	43.	isiampui-jula Glamle	Granne			Stone Mason y	
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	11	Neelum Granita Karan	Granita	=			ad
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	44.	riccium Granite Kerall	Oranite	Danjai - Kelali			ab
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	15	Dudhaiol Assesses	Matagarhanata	MT Danar		Ditumon mlain	ffar
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	45.		wietacarbonates		1.000 million M <sup>3</sup>		IZa
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific		Carbonates		Duummai			Mu
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	46	Malik Seri Dolorite	Dolorite	Between Khawaia	13.5 million $M^3$	-	u / u
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific	10.		2 olorite	5			In
47.  Kel Dolorite dykes  Dolorite  Kelser - Kel Road  Under prospection  All type of concrete work    48.  Changan Meta  Dolorite  Changan - Dolorite  1.776 million M <sup>3</sup> Specific							Vee
47.Kel Dolorite dykesDoloriteKelser - Kel RoadUnder prospectionAll type of concrete work48.Changan MetaDoloriteChangan - Dolorite1.776 million M³Specific							<b>F</b> -1
48.  Changan Meta  Dolorite  Changan -  1.776 million M <sup>3</sup> concrete work With Project Specific	47.	Kel Dolorite dykes	Dolorite		Under	All type of	
48.  Changan Meta  Dolorite  Changan -  1.776 million M <sup>3</sup> With Project    Specific						concrete work	
D II I D II Specific	48.	Changan Meta	Dolorite	Changan -			
A A A A A A A A A A A A A A A A A A A		Dolorite		Dudhnial Road		studies	



49.	Dhokran Gneiss Kel	Granitic Gneiss	Kel-Dhokran Road	Under prospection	Stone Masonry	
50.	Arja - Dalkot Section	Sandstone	Near Arja	Under prospection	Only for marginal use concrete (upto 2000psi strength) with OPC	Poonch
51.	Gio Nullah Rawalakot			Under prospection		
52.	Khaigalla-Hajira outcrop		Near Hajira	Under prospection		
53.	Hajira Abbaspur road out crop		Hijira Abbaspur road out crop	Under prospection		
54.	Hajira Nar outcrop			Under prospection		
55.	Ban Ni Bhek Toli Pir Road		Along Toli Pir road	Under prospection		
56.	Jhandala Sandstone		Arja Tain Road Jhandal Locality	Under prospection		
57.	Pappay Nar	Sandstone	Along Tararkhal to Palandri Road	Under prospection		Sudhnuti
58.	Tarar Khal			Under prospection		
59.	Nar near Tarar khal Bazar along Hajira road		Along Tararkhal to Hajira Road	Under prospection		
60	Azad Pattan (Madan)		Azad Pattan - Kalri road	Under prospection		

18 18/2016

(Naveed Azad) Geologist/Material Engineer

18/8/2016

(Syed Ahmed Hassan) Geotechnical/Material Engineer

27 AV donal. 18/8/20 the

(Engr.Altaf Ahmed) Chief Rate Analysis-P&DD

# SECTION – 1

## CARRIAGE

- 1. CARRIAGE OF MATERIALS INCLUDE LOADING, UNLOADING AND STACKING AT SITE.
- THE RATES ARE APPLICABLE TO CARRIAGE OF MATERIAL ON PACCA ROAD ONLY.
   FOR KACHA ROADS AN ALLOWANCE OF 25% EXTRA SHALL BE ALLOWED FOR 2<sup>ND</sup> SUBSEQUENT DISTANCE COVERED IN KM.(MILES) RATES.
   RATES UP TO 1<sup>ST</sup> MILE (1<sup>ST</sup> KM.) IS HOWEVER COMMON TO BOTH KACH AND PACCA ROADS.
- 3. FOR HILLY AREAS 25% ABOVE THE RATES IN THE PLAIN AREAS BE ALLOWED FOR TOTAL DISTANCE COVERED IN KM.(MILES).
- 4. THE TERM "KM." WHENEVER USED IS TO MEAN STATUE KILOMETER.
- 5. THE RATES FOR CARRIAGE BY BOAT OR STREAMER SHALL BE THE SAME AS BY ANY OTHER MECHANICAL MEANS ON LAND.





# SECTION - 2

# LOADING, UN-LOADING AND STACKING

1. THE RATE FOR LOADING INTO AND UN-LOADING FROM TROLLIES & BOATS WILL BE THE SAME AS FOR MOBILE TRUCKS.

# EARTH WORK

- 1. THE SOIL CLASSIFACTION (HARD, VERY HARD, WET AND SLUSH) WILL BE APPROVED BY THE SUPERINTENDING ENGINEER.
- 2. IN CASE OF EMBANKMENT FILL, THE MODE OF MEASUREMETN WILL BE INDICATED IN THE TENDER.
- 3. IN CASE BANK MEASUREMENT IS NECESSARY, FOLLOWING ALLOWANCES SHOULD BE PROVIDED FOR:
  - a) DEDUCATION FOR SHRINKAGE FROM THE BANK MEASUREMENT WHEN THE EARTWORK IS DONE BY MANUAL LABOUR = 10%.
  - b) DEDUCATION FOR SETTLEMENT FROM THE BANK **MEASUREMENTS** WHEN THE EARTH-WORK IS DONE BY DIFFERENT TYPE OF MACHIANARY WILL BE AS UNDR: i. TRACTOR 6% ii. BULLDOZERS 4% iii. SCRAPERS 3% Where the above equipment is deployed in fleet the minimum factor specified will be applied.
- 4. NO DEDUCATION WILL BE MADE FOR RAMMED/ COMPACTED FILL.





# **SECTON-4**

## DISMANTLING (DEMOLISHING)

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL AND BY PRODUCTS.
- 2. THE RATES FOR DISMANTLING ROOFS OR UPPER STORY FLOOR INCLUDE THE DISMANTLING OF ALL MATEHIALS, EXCEPT ROOF SUPPORTS SUCH AS BEAM AND TRUSSES.
- 3. ADD EXTRA 20% AND 25% FOR 2<sup>ND</sup> & 3<sup>RD</sup> AND 30% FOR 4<sup>TH</sup> & SUBSEQUENT FLOORS RESPECTIVELY.



## **SECTION-5**

# PLAIN AND REINFORCED CONCRETE


- 1. RATES FOR ITEM 5-2 TO 5-4 ARE FOR UNFORMED CONCRETE
- 2. RATES FOR OTHER ITEMS ARE FOR MACHINE MIXED FORMED CONCRETE IN CASE EXIGENCY OF THE WORK SO WARRANTS, HAND MIXING MAY BE DONE WITH ADDITION OF 10% EXTRA CEMENT AT NO EXTRA COST.
- 3. THE CEMENT CONCRETE MAY EITHER BE PLAIN OR REINFORCED AND SHALL BE PAYABLE AT THE RATES SPECIFIED AGAINST RESPECTIVE ITEMS. THE STEEL REINFORCEMENT SHALL HOWEVER BE PAYABLE SEPARATELY UNDER APPLICABLE ITEMS 5-44 OF THE SCHEDULE.
- 4. RATES FOR ALL FINSHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSEK MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



### **SECTION-6**

## PRESTRESSED CONCRETE

- 1. RATES FOR ALL FINSHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRAI, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE PRESTRESSED CONCERETE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH SPECIFICATIONS LAID DOWN BY FREYSSINET OR SIMILAR SYSTEM.



## PILE FOUNDATION CONCRETE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES FOR DRILLING FOR DIFFERENT SIZES OF PILE SHALL BE THE SAME AS FOR TUBEWELL GIVEN IN SECTION – 27.





## SECTION-8

### DAMP PROOF COURSE AND WATER PROOFING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.



## **SECTION-9**

### CEMENT CONCRETE BLOCK MASONRY

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.
- 2. NO PAYMENT SHALL BE MADE FOR FORMING CAVITIES IN BLOCK AND NO DEDUCTION TO BE MADE FOR HOLLOWNESS IN BLOCKS.
- SKIN THICKNESS OF HOLLOW BLOCKS SHALL BE 1" (25 mm) FOR BLOCK SIZE 300 x 100 x 200, 300 x 150 x 200, 225 x 100 x 150 AND 300 x 100 x 200.
- 4. SKIN THICKNESS OF HOLLOW BLOCKS SHALL BE 1.5" (38 mm) FOR BLOCK SIZE 300 x 200 x 200, 300 x 300 x 200, 225 x 200 x 150 AND 225 x 300 x 150.
- 5. CONCRETE BLOCK SHOULD MEET THE REQUIREMENT OF 2000 PSI CRUSHING STRENGTH.



# Bridges

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY- PRODUCTS AND SITE CLEARANCE.
- 2. IF CONCRETE MIXER OR HIGH FREQUENCY VIBRATOR, ETC. SUPPLIED BY THE GOVERNMENT, ALL CHARGES INCLUDING DEPRECIATING WILL BE RECOVERED FROM THE CONTRACTOR.
- 3. SUBSEQUENT CARRIAGE OF CRUSH STONE AGGREGATE WILL BE PAID ACCORDING TO THE WHOLE DISTANCE TO THE SITE OF WORK, SHALL BE CALCULATED ON THE BASIS OF RATE OF THE ACTUAL MEAN OF TRANSPORT USED IN CARRIAGE. IT SHALL BE PAYABLE FROM THE NEAREST APPROVED QUARRY.



# **BRICK WORK**

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE RATE APPLIES TO ALL SIZES OF BRICKS.
- 3. IN 2<sup>ND</sup> OR 3<sup>RD</sup> CLASS BRICKS ARE USED INSTEAD OF FIRST CLASS, THE DIFFERENCE IN RATE OF BRICKS IS DEDUCTED.
- 4. NO DEDUCTION IN MEASUREMENTS SHALL BE MADE FOR OPENING HAVING SUPERFICIAL AREA NOT EXCEEDING ONE SQUARE FOOT (0.35 SQUARE METERS).



# STONE MASONRY

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



# **SECTION-13**

# ROOFING

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. ADD EXTRA 5% AND 10% SECOND, THIRD, 15% FOR FOURTH AND SUBSEQUENT FLOOR RESPECTIVELY.



\_\_\_\_

# **SECTION-14**

# FLOORING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



\_\_\_\_

## **SECTION-15**

## FINISHING


1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



#### **SECTION-16**

## WOOD WORK


- 1. NO EXTRA RATE IS TO BE PAID FOR SAWING.
- 2. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



## PAINTING AND VARNISHING

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES INCLUDE CHARGES FOR SCAFFOLDING AND OTHER ARRANGEMENTS AT ANY HEIGHT AND IN ANY FLOOR.
- 3. RATES FOR PAINTING SASHES, FANLIGHT, FULLY GLAZED OR FULLY GAUGED DOORS AND WINDOWS SHALL BE 60% OF RESPECTIVE ITEMS.





## LINING OF CANALS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES ALSO INCLUDE CURING FOR SPECIFIED PERIOD WHEREVER NECESSARY.
- 3. NOMINAL DIMENSIONS OF TILE OR BRICK SHALL BE TAKEN FOR THE PURPOSE OF MEASUREMENT AND PAYMENT.
- 4. JOINTS TREATMENT WILL BE PAID FOR RESPECTIVE ITEMS IN SECTION – 5 "CONCRETE"





# PROTECTION AND DIVERSION WORKS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.
- 2. THE COMPOSITE RATES OF THE ITEMS IN WHICH STONE, BOULDER, SHINGLE ETC. AND USED DO NOT CONTAIN THE CARRIAGES OF THESE MATERIALS WHICH WILL BE PAID SEPARATELY WHICHEVER MEANS OF TRANSPORT IS ADOPTED. THE SUPPLY AND CARRIAGE TO SITE OF WORK OF ALL OTHER MATERIAL, REQUIRED IN ITEM IS INCLUDED IN THE COMPOSITE RATE.
- 3. THE CARRIAGE OF STONE OR SPAWL WILL BE PAID ON THE BASIS OF ACTUAL STACK MEASUREMENT (WITHOUT ANY REDUCTION FACTOR) OF THE STONE, BOULDERS, SHINGLE OR SPAWL CARRIED.
- 4. THE STONE, BOULDERS OR SPAWL IS WHERE ISSUED FORM STOCK AND THE CONTRACTOR IS PAID FOR CARRIAGE AND /OR LABOUR ONLY OR WHERE SUCH STONE PRODUCT IS SUPLLIED, CARRIED OR HANDLED BY THE CONTRACTOR IN WHICH NO LAYING IS REQUIRED, THE ACTUAL STACK MEASUREMENT (WITHOUT ANY REDUCTION FACTOR) SHALL FORM THE BASIS OF PAYMENT OF SUPPLY OR CARRIAGE OF THE STONE, BOULDER OR SPAWL ETC. THE QUANTITY OF FINSHED AND COMPLETED ITEM OF WORK SHALL FORM THE BASIS OF THE LAYING.
- 5. IN CASE OF THE ITEMS IN WHICH THE RATES INCLUDE CARRIAGE OF STAKES, BUSHING, PILCHI, SARKANDA OR FRASH ETC. WITHIN ONE KM.
  - a) THE COST OF THE CARRIAGE WITHIN ONE KM. SHALL NOT BE DEDUCTED FROM THE CARRIAGE CHARGES TO FOLLOW THEREAFTER FROM THE POINT OF SUPPLY.
  - b) IF THE SITE OF WOK HAPPENS TO BE WITHIN ONE KM. OF THE SOURCE OF SUPPLY, THE MATERIAL WILL BE COLLECTED AND MEASURED AT SITE OF WORK AND NO EXTRA CARRIAGE WOULD BE ADMISSIBLE IN SUCH CASES.
  - c) WHERE THE SITE OF THE WORK IS SITUATED AT MORE THAN ONE KM. DISTANCE FROM THE SOURCE OF SUPPLY, THE POINT OF SUPPLY WILL BE FIXED CAREFULLY BY THE ENGINEER-IN-CHARGE IN SUCH A WAY THAT THE CARRIAGE CHARGES WOULD BE ARRIVED AT THE MOST ECONOMICALLY.EXTRA CHARGES WILL BE ADMISSIBLE FROM THE PLACE OF STARTING POINT. THE DEMARCATION OF THE PLACE OF SUPPLY SHALL BE PRE-DETERMINED BEFORE CALLING THE TENDERS.
- 6. IN CASE OF STONE PITCHING WORK, NO VOIDS DEDUCTION WILL BE MADE WHILE MEASURING THE FINISHED WORK.



## OUTLETS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE ITEMS OF WORK INVOLVED IN CONSTRUCTION OF OUTLETS SUCH AS EARTHWORK, CONCRETE AND BRICK WORK SHALL BE PAID FOR UNDER RESPECTIVE ITEMS OF THE RELEVANT SECTION.
- 3. THE MANUFACTURE, SUPPLY AND DELIVERY TO SITE OF A.P.M. AND/OR O.F. OUTLETS IRON BLOCKS SHALL BE THE RESPONSIBILITY OF THE DEPARTMENT.



#### SECTION-21

## ROAD AND ROAD STRUCTURES

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE RATES INCLUDE PROVISION AND MAINTENANCE OF FIELD TEST LABOUATORY STAFF, COST OF MATERIAL FOR TESTING ETC.
- 3. PAYMENTS FOR ITEMS OF ROADS AND ROAD STRUCTURE SHALL BE MADE FROM THIS SECTION.
- 4. BITUMEN FULFILLING THE INTERNATIONAL STANDARDS LIKE :
- (i). ASTM-D-946 and AASHTO-M-20 (Penetration)
- (ii). ASTM-D-3381 and AASHTO-M-226 (Viscosity)
- (iii). ASTM-D-6373 and AASHTO-M-320 (Graded Binder)
- 5. SHOULD BE USED AFTER BATCHWISE TESTING AT SITE, AS PER DIRECTIONS OF ENGINEER INCHARGE.



**SECTION-22** 

## SHEET PILING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



#### SECTION-23

## PLUMBING, SANITARY INSTALLATIO & GAS FITTINGS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. THE RATES INCLUDE CUTTING AND MAKING GOOD OF THE SURFACE OF WALLS, ROOFS, AND FLOORS ETC. WHER NECESSARY.
- 3. ADD 10% EXTRA FOR FIXING SPECIALS IN REPAIR WORK FOR ITEM 23-46.



#### SECTION-24

## SURFACE DRAINAGE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. CEMENT PLASTER WHERE APPLIED SHALL BE MEASURED FOR PAYMENT SEPERATELY.



#### SEWERAGE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. EXCAVATION AND BACKFILLING FOR FOUNDATION AND TRENCHES SHALL BE PAID FOR SEPARATELY.
- 3. DEPTH OF CHAMBER SHALL BE MEASURED VERTICALLY FROM TOP OF COST IRON COVER TO TOP SURFACE OF FLOORING.
- 4. IF SPECIFACATIONS OF MANHOLES AS MENTIONES IN ITEM NO. 25-4 TO 25-8 ARE NOT MET THAN PAYMENT SHALL BE MADE FOR DIFFERENT ITEMS FROM OTHER SECTIONS OF THIS SCHEDULE.



#### **SECTION-26**

## SINKING OF WELLS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. WELL CURBS TO BE LAID AT SPRING LEVEL OR AS DEEP AS POSSIBLE.
- 3. THE OUTER DIMENSIONS OF THE CURB SHALL FORM BASIS OF PAYMENT.



SECTION-27

## TUBEWELL AND WATER SUPPLY

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE CAST IRON PIPES AND FITTINGS SHALL COMPLY WITH B.S. 78 FOR SPIGOT AND SOCKET, CAST IRON VERTICALS PIPES AND B.S. 2035 FOR FLANGED PIPES.
- 3. P.V.C. PIPES AND FITTINGS SHALL COMPLY WITH B.S. 3505.
- 4. ASBESTOS CEMENT PIPES AND FITTINGS SHALL COMPLY WITH B.S. 486
- 5. GALVANIZED IRON PIPES AND FITTINGS SHALL COMPLY WITH B.S. 1387-1967



#### **SECTION-28**

## IRON STEEL & ALUMINIUM WORK

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



**SECTION-29** 

## HORTICULTURE

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



#### **SECTION-30**

# ELECTRICAL INSTALLATIONS

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



#### BASIC DATA

THE BASIC RATES OF CONSTRUCTION MATERIALS, LABOUR AND HIRE CHARGES OF PLANT & EQUIPMENT HAVE BEEN LINKED WITH FILES IN DETAILED ANALYSIS (Volume-1). ANY REVISION INITIATED IN THE "BASIC DATA" FILE CORRESPONDINGLY REVISE THE RELEVENT ITEM RATE. THESE RATES HAVE BEEN OBTAIND AFTER EXTENSIVE MARKET SURVEY.