

### AZAD GOVERNMENT OF THE STATE OF JAMMU AND KASHMIR

# **COMPOSITE SCHEDULE OF RATES**

Updated for 1st Semi-annual (Jul - Dec) 2018-19

#### **DISTRICT JEHLUM VALLEY**

PLANNING AND DEVELOPMENT DEPARTMENT, KASHMIR PLAN HOUSE. BLOCK NO. 11, NEW CIVIL SECRETARIAT, Go.AJK MUZAFFARABAD.

Ph. 05822-924117. www.pndajk.gov.pk, chief.ra@pndajk.gov.pk.



# **PREFACE**

The Planning & Development Department, Government of AJ&K felt the need to have a Composite Schedule of Rates (CSR) for AJ&K. The Composite Schedule of Rates was required to introduce a common basis for value engineering in accordance with the geophysical conditions and available resources of AJ&K. National Engineering Services Pakistan (Pvt.) Limited (NESPAK), being the largest Consultant firm and having a rich experience of various projects in AJ&K was engaged to carry out the assignment. It was agreed that due to urgency of implementing a CSR for ongoing development works in AJ&K, NESPAK has submited CSR in three stages i.e: Pre-Interim, Interim and Final. Pre-Interim CSR was submitted in March, 2008 and after receiving feedback from all the stakeholders Interim CSR was submitted and its enforcement was approved by the AJK Cabinet in its meeting held on August 19, 2009. Additional items of work have been added upon the recommendations of various Departments. The rates used for the preparation of this Composite Schedule of Rates have been updated to the prevailing prices of construction materials, machinery and labour for the month of January 2016 in all ten districts of AJ&K on semi-annual basis.

The CSR-2009 (updated) has been computerized in such a manner that links exist between the basic data file, comprising rates of construction materials, labor and rental of machinery. Furthermore those calculation carried out in files of detailed analysis (Volume-II, A & B) and resulted to modify the files of Composite Schedule of Rates (Volume-I). Any revision initiated in the "basic data" file would correspondingly revise the relevant item rate.

The Schedule consists of two Volumes; namely Composite Schedule and Detailed Analysis for each district of AJ&K. Each page of the CSR bears identification details with respect to its edition, volume and district.

Minor adjustment in the market rates have been made using best professional judgment and using data from our survey of various districts of AJ&K and other cities of Pakistan. The Rate Analysis Section constituted by the Government of AJ&K is deputed to monitor and resolve difficulties that may arise in the application of the rates contained in this schedule to cope with regional imbalances at a given time.

All cost estimates for administrative approval and detailed estimates for technical sanction shall be prepared on the basis of rates provided in the Schedule. This Schedule will form bench mark for inviting tenders for which specific item of works included in the estimate shall be identified for quotation above or below the rates.

The rates for items other than those given in this Schedule shall be treated as non-scheduled items. The analysis of rates for such items shall be prepared by the concerned Executive Engineer and approved by the competent authority (Superintending Engineer) before the work undertaken, keeping in view the provisions of the delegations of the financial powers. Copies of the approved rate analysis shall be forwarded to Rate Analysis Section P&DD for reference and review where-ever found necessary and then incorporation in next updation, if justified. This Schedule of Rates supersedes all previous documents and shall become effective from the date of issuance.



# TABLE OF CONTENTS

- 0. CONSTRUCTION MATERIAL SOURCES STUDY
- 1. CARRIAGE
- 2. LOADING, UN-LOADING AND STACKING
- 3. EARTH WORK
- 4. DISMANTLING (Demolishing)
- 5. PLAIN AND REINFORCED CONCRETE
- 6. PRESTRESSED CONCRETE
- 7. PILE FOUNDATION CONCRETE
- 8. DAMP PROOF COURSE AND WATER PROOFING
- 9. CEMENT CONCRETE BLOCK MASONRY
- 10. BRIDGES
- 11. BRICK WORK
- 12. STONE MASONRY
- 13. ROOFING
- 14. FLOORING
- 15. FINISHING
- 16. WOOD WORK



# TABLE OF CONTENTS

- 17. PAINTING AND VARNISHING
- 18. LINING OF CANALS
- 19. PROTECTION AND DIVERSION WORKS
- 20. OUTLETS
- 21. ROAD AND ROAD STRUCTURES
- 22. SHEET PILING
- 23. PLUMBING, SANITARY INSTALLATIONS AND GAS FITTINGS
- 24. SURFACE DRAINAGE
- 25. SEWERAGE
- 26. SINKING OF WELLS
- 27. TUBEWELL AND WATER SUPPLY
- 28. IRON, STEEL AND ALUMINUM WORKS
- 29. HORTICULTURE
- 30. ELECTRICAL INSTALLATIONS



### GENERAL CONDITIONS

- 1. The work contained in this Schedule of Rates shall be carried out in accordance with the specifications given briefly for each item and the applicable provisions of the West Pakistan Schedule of Rates Committee Specifications as adopted by the Government of AJ&K duly amended from time to time
- 2. The rates entered against all items in the Schedule of Rates are those referred to in contract as the basic rates which cover the cost of all materials, transportation to site of work, labour, equipment, tools, plants, supervision charges, all Government levies, imports, octroi charges, overheads, profits and incidental cost thereto required for the satisfactory completion of the work. Charges for testing the Public Health engineering and Electrical works are also included in this schedule.
- 3. Unless otherwise stipulated, measurements for payment for the work done shall confirm to the specification for the execution of works West Pakistan Standing Rates Committee adopted by the Government of AJ&K.
- 4. For certain items of the work floor-wise rates have been entered in this schedule. For this purpose, the rates for the basement shall be applied to all works below the foundation up to the top of roof of basement. Rates for the ground floor include the cost of all works from the top of the basement roof up to the top of ground floor and so on. Parapet, water tank and stair wall etc. shall be considered as part of the floor above which these are constructed.
- 5. If a discrepancy is found between various documents, the order of precedence given below shall govern to determine the scope of the contracted work forming part of the contract based on this schedule:
  - Schedule of Quantities
  - West Pakistan Standing Rates Committee Specifications as adopted by the Government of AJ&K.
  - Special condition of the agreement
  - Conditions of contract
  - Drawings
- 6. The unit rates of plant, materials and labor given in this schedule are indicative and shall not form bases for a claim by the contractor for the works let out on percentage above or below the composite schedule of items.
- 7. Nominal conversion figures from System International to System Imperial have been given as complete switch over has not yet been achieved.
  - i. Cost of Manpower not charged to the items directly such as Contractor's Head Office, Project Office, Security, Laboratory, Survey, Account, Stone and Administration staff.
  - ii. Expenses on Laboratory, Camp, Workshop, Office and allied equipments and fixtures.
  - iii. Small equipment, tools and attachments.
  - iv. Advance tax deductible at source.



# ABBRIVATIONS USED

SYSTEM IMPERIAL		SYSTEM INTERNATIONAL	
Running foot	R.ft.	Millimeter	mm
Square foot	Sq.ft.	Centimeter	cm
Cubic foot	Cu.ft.	Running Meter	RM
Pound	Lb	Square Meter	Sq.m
Ounce	Oz	Cubic Meter	Cu.m.
Pounds per Square inch	Psi	Kilogram	Kg.
Gross	Grs	Newton per millimeter square	N/mm <sup>2</sup>
Maund	Mnd	Hundred	Hund
Dozen	Dz		



	INTO	MULTIPLY BY
LENGTH		
Inch	Millimeter	25.40
Millimeter	Inch	0.0394
Foot	Meter	0.3048
Meter	Foot	3.2808
Yard	Meter	0.9144
Meter	Kilometer	1.6093
Kilometer	Mile	0.6214
Canal Mile (500 feet)	Kilometer	1.524
Kilometer	Canal Mile	0.6562
Girah	Millimeter	57.15
Mile International		
Nautical (6076.12 feet)	Meter	1852.00
Mile UK nautical (6080 feet)	Meter	1853.18
MASS WEIGHT		
Pound	Kilogram	0.4536
Kilogram	Pound	0.2046
Ounce	Gram	28.3495
Gram	Ounce	0.0353
Quintal	Kilogram	100.00
Grain	Milligram	64.7989
Hundred Weight	Kilogram	50.8023
Tonne	Kilogram	1000.00
Ton	Kilogram	1016.047
MASS WEIGHT		
Ton	Tonne	1.0160
Tonne	Ton	0.9842
Seer	Kilogram	0.9331
Maund	Kilogram	37.324
Tola	Gram	11.664
Short Ton (2000 lbs)	Tonne	0.9072



TO CONVERT	INTO	MULTIPLY BY
AREA		
Square Inch	Square Millimeter	645.16
Square millimeter	Square inch	0.0015
Square Foot	Square Meter	0.0929
Square meter	Square foot	10.7639
Square Yard	Square meter	0.8361
Square meter	Square Yard	1.1960
Acre	Square meter	4046.8564
Acre	Hectare	0.4047
Hectare	Acre	2.4787
Hectare	Square meter	10000
Square mile	Square kilometer	2.5899
Square Kilometer	Square mile	0.3861
Square mile	Hectare	258.999
Hectare	Square mile	0.00386
CAPACITY, VOLUME AI	ND MODULES OF SECTION	
Pint (UK)	Liter	0.5683
Gallon (imperial)	Liter	4.5461
Cubic foot	Liter	28.3168
Cubic meter	Liter	1000

Liter	28.3168
Liter	1000
Cubic foot	0.0353
Millimeter	16.3871
Millimeter	28.413
Gallon (imperial)	0.2199
Cubic millimeter	16387.1
Cubic meter	0.0283
Cubic foot	35.3147
Cubic meter	0.7645
Cubic yard	1.3080
Hectare meter	0.1233
	Liter Cubic foot Millimeter Millimeter Gallon (imperial) Cubic millimeter Cubic meter Cubic foot Cubic meter Cubic meter Cubic yard



TO CONVERT	INTO	MULTIPLY BY
VLOCITY AND SPEED		
Foot per second Foot per minute Foot per second Kilometer per hour Mile per hour Kilometer per hour Mile per hour	Meter per second Meter per second Kilometer per hour Foot per second Meter per second Mile per hour Kilometer per hour	0.3048 0.0051 1.0973 0.9113 0.4470 0.6214 1.6093
FORCE		
Kilogram force Pound force Ton force Newton Kilo Newton	Newton Newton Kilo Newton Pound force Ton force	0.8066 4.4482 9.9640 0.2248 0.1004
FORCE PER UNITE LEN	<u>GTH</u>	

Pound force per foot	Newton per meter	14.5939
----------------------	------------------	---------

#### PRESSURE, STRESS AND MODULES OF ELASTICITY (1Pa=1N/m<sup>2)</sup>

Pound per Square foot	Pascals	47.8803
Pound force per square inch	Kilo Pascals	6.8948
Ton force per square inch	Kilo Pascals	107.252
Kilo Pascals	Pound force per square foot	20.8354
Ton force per square inch	Mega pascals	15.4443
Mega Pascals	Pound force per square inch	145.038

#### MASS PER UNIT LENGTH

Pound per foot	Kilogram per meter	1.4882
Kilogram per meter	Pound per foot	0.6720
Ton per mile	Ton per kilometer	0.6313



TO CONVERT	INTO	MULTIPLY BY
MASS PER UNIT AREA		
Ton per Square mile Pound per square foot Kilogram per square meter	Kilogram per square kilometer Kilogram per square meter Pound per square foot	392.298 4.8824 0.2048
MASS PER UNIT VOLUME		
Pound per Cubic foot Pound per Cubic foot Kilogram per Cubic meter Grams per Liter	Kilogram per Cubic meter Grams per liter Pound per cubic foot Pound per cubic foot	16.0185 16.0185 0.06243 0.06243
VOLUME RATE OF FLOW		
Cubic foot per second (cusec) Cubic foot per second (cusec) Gallon per minute Cubic foot per thousand acres Cubic foot per thousand acres	Cubic meter per second (cusec) Liter per second Liter per second Liter per hectare Cubic meter per square kilometer	0.02832 28.3168 0.0757 0.0670 r 0.0070
FUEL CONSUMPTION		
Gallon per mile Mile per Gallon	Liter per kilometer Kilometer per liter	2.825 0.354
MOVEMENT OF FORCE TORC	<u>NUE</u>	
Pound force foot Pound force inch Ton force foot Ton force inch	Newton meter Newton meter Kilonewton meter Kilonewton meter	1.3558 0.1130 3.0370 0.2531



TO CONVERT	INTO	MULTIPLY BY
SECOND MOMEMT OF AREA		
Inch <sup>4</sup>	Millimeter <sup>4</sup>	416231
PLANE ANGLE		
Degree	Radian	0.0174
WORK, ENERGY, POWER (1J =1Ws)		
Kilowatt hour Foot pound force Horse Power Horse power	Kilo joule Joule Kilowatt Kilogram force meter per sec	3600 1.3558 0.7457 76.0402

\*For exact values, please consult Standard Hand Books



Nominal	Minimum cube strength required (in psi)			)
Mix	Laborato	ry Tests	Work	Tests
	7 days	28 days	7 days	28 days
1:1:2	4000	6000	3000	4500
1:11/2:3	3350	5000	25000	3750
1:2:4	2700	4000	2000	3000
1:3:6		2500		2000
1:4:8		2000		1500

#### 1. <u>Concrete Compressive Strength (Test Table)</u>

Ref. AJK Technical & General Specifications Chapter No.05 (Plan & reinforced concrete)Page No.5-10

#### 2. Bricks Compressive Strength (Test Table)

Designation	Average	Max. Water Absorption
	Compressive	% by weight
	strength (lbs/Sq.inch)	
First Class	2000	1/6 <sup>th</sup> of its weight (average weight of ten
		bricks shall not less than 5.5lb (2.5kg)
Second Class	1500	1/4 <sup>th</sup> of its weight
Third Class	1000	
Fourth Class	725	

Ref. AJK Technical & General Specifications Chapter No.11 (Brick Work) Page No.11-2

#### 3. Uniaxial Compressive Strength of Stones (Test Table)

Type of Stone	Weight (lbs/cft) Average	Maximum Water Absorption Percentage by weight	Minimum Compressive Strength kg./sq.cm.
Granite	165	0.5	1000
Basalt	225	0.5	400
Lime Stone (Slab & Tiles)	160	0.15	200
Sand Stone (Slab & Tiles)	140	2.5	300
Marble	170	0.4	500
Quartzite	225	0.4	800
Laterite (Block)		12	35

Ref. AJK Technical & General Specifications Chapter No.12 (Stone Masonry) Page No.12-1



#### **Properties of Steel**

#### A. Dimension Properties:-

Bar Designation	Weight (K.G/Foot)	Diameter	Tolerance on Mass
3	0.170	0.375	±12
4	0.303	0.500	
5	0.477	0.625	
6	0.680	0.750	±9
7	0.930	0.875	
8	1.213	1.000	±6.5
9	1.530	1.128	±6.5
10	1.960	1.270	±6.5
11	2.415	1.410	±4.5
14	3.477	1.693	±4.5
18	6.182	2.257	±4.5

#### B. Physical Properties (ASTM A-615/ A 615M)

Grade	Yie	eld	Ultimate Ter	sile Strength	Elongation Min. %age
Grade	MPa	Psi	MPa	Psi	
40	280	40,000	420	60,000	12
60	420	60,000	620	90,000	9
75	520	74,500	700	1,00,000	6

#### C. <u>Chemical Properties</u>

			Chemical	Composition	% age		
Grade	Min	Carbon	Si		Pota	shium	Sulpher
			Ι	II	Ι	II	
Fe Mn 74C	70-77	7.0	2.0	3.0	0.25	0.38	0.03
Fe Mn 68C	65-72	7.0	2.5	4.5	0.25	0.40	0.03



#### Conversion Table of Lift to Lead

In the case of earthwork measurement where extra lead is to be paid for lift the method will be as follows: The lift will be measured from the centre of gravity of the excavated earth to that of placed earth. This will constitute the mean lift for the section.

When earth has to be carried over a spoil bank and dumped beyond it the mean lift would be the difference in level between the centre of gravity of the excavated earth and the top of the spoil bank omitting the dowel.

#### The equivalent leads for various means lifts are given below:

Lift in Meters	<b>Conversion Factors</b>	Equivalent Horizontal lead in Meters
0.5		4
1.0	8	8
1.5		15
2.0	10	20
2.5		25
3.0		36
3.5		47
4.0		60
4.5		75
5.0	3.28x Lift in Meter+2	92
5.5	5.26X LIII III Metel+2	110
6.0		130
6.5		152
7.0		175
7.5		200
8.0		216
8.5		230
9.0	27	243
9.5		257
10.0		270

#### Note:

These conservation factors also incorporate allowance for extra lead due to cross lead with a view to ensuring a uniform system. The equivalent lead will be added to the horizontal lead to get the total lead to be paid. The exact site or R.D.s between which extra lead is to be given must be recorded in the first column of detailed measurement in the Measurement Book.

REF. Rates Directorate Coordination and Monitoring Division (Water) WAPDA House Lahore, Section-II Earthwork Excavation and Embankment Page 2-8 WCSR

SWG Sr.No. mm Inches 8 SWG 4.064 1. 0.160 2. 10 SWG 3.251 0.128 3. 12 SWG 2.642 0.104 14 SWG 2.032 4. 0.080 **16 SWG** 1.626 5. 0.064 **18 SWG** 1.219 6. 0.048 7. 20 SWG 0.914 0.036 8. 22 SWG 0.711 0.028 24 SWG 9. 0.559 0.022 10. 26 SWG 0.457 0.018 11. 28 SWG 0.376 0.015 12. 30 SWG 0.315 0.012

#### SWG to Millimeter & Inches Conversion Chart



PHYSICAL ENGINEERING PARAMETERS SPECIFICATION LIMITS																	
ASTM C-33 SPECIFICATION LIMITS					ROA	ROAD AGGREGATE	REGATE							FIN	FINE AGGREGATES	GATES	
ASTM C-33 SPECIFICATION LIMITS		a de la de l	State State	*Tent	*Tentative Limits	mits	and the first of	a the second	14 Et - 2 .		29 2. 181	A STATE					
	Heavy Tr	avy Traffic Roads†	adst	Med	Medium Traffic Roads†	Lic	Light T	Light Traffic Roads†	oads†	OTHSAA	TRL		ASTM LIMITS		Morta	BS Mortar and Plaster	ster
	bruodnU IIA	92000 DuinseW	suonimutiß Base/-du2\-assB	bnuodnU IIA	eanng Course	suonimujiš 926/du2/9268	bnuodnU IIv	esning Course	suonimuti 9267-du2\926	li type of roads	səxiM suonimut	tnoodn tnomeve	ne Aggregate for Concrete and Mortar	ssonry Mortar	or Screed	punebneß leme	- pinetening
Specific Gravity (not less than) 2.5		-		,			7	^		V	-		Ŀ	≥M	PIE	EX	Gyi
Water Absorption (not more than. %) 1								and the second				-					
Sodium Sulfate Soundness (max. %) 12																	
Los Angeles Abrasion Value (max. %) 50	36	36				-		A			12						
Å	-	_	30	30	30	35	35	30	35.		30	35					
Shale (% by wt.) 1													3				
Clay Lumps and Friable Particles (% by 2 wt.)													~				
Other Deleterious Substances (% by wt.) 1													,				
Impact Value (max.)	23	23	30	27	27	30	30	77	30		30						
Crushing Value (max.)	23	23	30	27	30	30	30	27	30		25						
10% Fine Value kN (min.) Dry	130	130	100	115	100	-	100	115	100	150		110					
10% Fine Value kN (min.) Soaked	80	65	50	65	65	50	50	65	50								
Flakiness (max.)											45 - 3	35-					
Sand Grading													ASTM	BS-	BS-112	BS-	BS-
Fineness Modulus												AST	ASTM C-33	0071		AALL	PALL
Mortar Bar Expansion % (max.) at 14 days 0.1 (ASTM 1260)													0.1				
Bitumen Adhesion (Not less than)										95	75						



1	AZAD GOVERNMENT OF THE STATE O	
36	PLANNING & DEVELOPMENT DEPARTM	IENT MUZAFFARABAD.
PO	(Rate Analysis Section M & E Win	
	TAMU B	
	No. Pⅅ/CSR & RA/ 24 - 68 /2012	Dated: January 23, 2012
1	The Secretary Works/ Communication	
2	The Secretary Physical Planning & Housing	
3	The Secretary Agriculture/ Animal Husbandry	
4	The Secretary Tourism/ Information/ Wildlife/ Fisheries	Combad
5	The Secretary Local Government & Rural Development	Govt. of AJ&K, Muzaffarabad
6	The Secretary Electricity/ Hydro Electric Board/ Private Power Cell	
7	The Secretary Education (Colleges)	
8	The Secretary Education (Schools) .	
9	The Secretary Sports/ Culture/ Youth/ Transport	
10	The Secretary SERRA	

item "Earth work" in Excavation of soil, hard strata and hard rocks.

Sir.

I am directed to refer the circular/letter No. /P&DD/Admin/7778-7830/209 dated September 15, 2009 and to submit that the earth work specifications for excavation in soil, hard strata and hard rocks have been completed, which are now uploaded on P&DD website www.pndajk.gov.pk. The said specifications can be easily downloaded for calculation of earth work item involved in all development projects.

For further query/ information and valuable comments (within two weeks) please feel free to contact this office.

(Engr. Altaf Ahmad)

Govt of A!&K, MuzalTarabad

Chief Rate Analysis Section.

#### Copy to:

8.

- 1. PS to the Additional Chief Secretary (Dev.)
- PS to the Secretary Planning & Development Department
- 3. PA to the Director General (M&E), P&DD
- 4. The Chief Engineer PWD (Buildings/ PHE), South
- 5. The Chief Engineer PWD (Buildings/ PHE), North
- The Chief Engineer PWD (Highways), South 6.
- The Chief Engineer PWD (Highways). North 7.
  - The Chief Engineer Sudai Kawait Development Fund
- 5) The Director General CDO
- 10. The Director General, water resources/ Irrigation, Agri. Deptt.

Continue Page No. 2

Ph. 05822-924117

Fax. (05822)-921006-921687

www.pndajk.gov.pk F: / Nisar's / CSR Letter pad

E-mail: chief.ra@pndaik.gov.pk



#### -11 1/3 Excavation & Grading of Rocks. A. EXCAVATION METHODS FOR ROCK Methods relates to rock strength and fracture density. Direct excavation: possible in fractured rock and in all soils; using face shovel, backhoe, clam . shell grab or dragline Ripping: needed to break up slightly stronger rock, using tractor-mounted ripper, or breaking with boom-mounted hydraulic pick (pecker). Blasting: generally required in stronger, less fractured rock. Rock is lossened in the ground by undercharged blasting in some quarries; on urban sites can be broken by hand-held pneumatic drill or by pecker. Massive rock of moderate or high strength needs to be fractured normally by blasting; where blasting is unacceptable, breaking by pecker or hydraulic breaker is very slow. "Annex - A Fig. 2" shows the excavation type and ranges with respect to UCS and Fracture spacing. B. CUT SLOPES IN ROCK Sound rock can be cut to vertical faces; normally raked back by 10° and benched at 10 m intervals to improve safety. Inclined fractures are main hazard, notably dipping 30-70° Dips > 50° normally required cutting face back to clean bedding or fracture. Shale beds may weather and undercut slopes in strong sandstone or limestone. Hillside excavations may undercut unstable weathered rock, old landslides or soliflucted head. Annex - "A" Fig. 1 shows the ranges of stable cutting slopes in rocks and soil. CUT SLOPES IN CLAY C. Drainage changes stability over time where face is cut into clay with initial water table near the surface. A. Excavation permits stress relief, pore water pressure (pwp) decreases. B. Pwp rises to regain equilibrium (drained state); strength and stability therefore decrease. C. Slope ultimately drains (or is artificially drained) to new lower water table; reduced pwp then increases stability. D. Premature failure occurs where stability is due to temporary pore water suction; failure may be in minutes or hours so faces are battered back for longer safety. Clay, Unweathered, may cut to 65° slopes to 8 m high where small slips can be tolerated. Stiff glacial till may stand close to vertical for some months at less than critical height, so retaining walls can be built in front. Weep horizons on sand layers cause instability. Lateral stress relief in slopes cut in over consolidated clay may cause outward movement. Settlement adjacent to stable cut slope may be 1-2% of excavation depth. Critical height, H Material Cohesion **Un-fissured** Fissured Soft Clay 25 KPa 5 m 3 m Firm Clay 50 KPa 10 m 6 m Stiff tile 12 KPa 24 m Values for typical fissure depth = z = 1.5 c/yThen Sr. where. 3 AV Awais Ahmed Engr. Altaf Ahmed Geologist Chief Rate Analysis Section Ph. 05822-924117 Rate Analysis Section

P&D Department (AJK)

P&D Department (AJK)



		Par	ge2/3		
	Fx	cavation and stren		ofrocks	
	1	UCS (unconfined	Buipiopernes		
Grade	Material /rock type and name	compressive strength) MPa	Density dry t/m3	Field Properties of Rocks	Work type
1	Coal	2-100	1.4	Crumble under blolws break with hammer and hand.	Pick work/ Jumper work
	Gypsum	20-30	2.2	Dent by finger nail white in col	Jumper work
	Salt	5-20	2.1	show cubical cleavage ductile deformation in stress	Jumper work
	Clay (Cretoceous)	1-4	1.8	Mold by fingers, break by hammer if compacted	Pick work
11	Musdtone (Carboniferous)			Break by hammer crumble	Jumper work/
	Chala / Cala / /	10-50	2.3	under pick blows. Break by	Pick work
	Shale (Carboniferous)	05-30	2.3		Pick work/ Jumper work
115	Chalk (Cretoceous)	05-30	1.8	hand.	Jumper work
	Limestone (Carboniferous)	50-150	2.6	moderately strong rock,	Jumper work/
	Dolomite	50-150	2.5	break by hammer lime stone.	Blasting work
V	Gneiss	50-200	2.7	Strong rock break by hammer	Jumper work/
	Marble	50-200	2.6	moderately strong rock,	
	Schist	20-100	2.7	break by hammer	
	Slate	20-250	2.7	Ripping needs to break.	Blasting work
V	Sandstone (Graywacke)	100-200	2.6	Blasting generally required to	Blasting work/ Chiseling
1	Conglomerate	variable	variable	Ripping and blasting required	Jumper work/
	weathered sandstone	5-40	1.9	if cemented conglomerate.	Blasting work
VI	Granite	50-350	2.7	Blasting, Chisling and ripping	Blasting
	Basalt	100-350	2.9	required to break, very strong	Contraction of the second s
	Quartzite	100-350	2.7	to strong rocks. Mostly rocks are Igneous and metamorphic	

SOURCE Foundations of Engineering Geological 2/ed. By TONY WALTAAM, Civil Engineering Department, Nattingham Trent University, UK. NOTES:

1 Selection of P/W, J/W, B/W and C/W depends upon the cementing material and matrix of the rock specially in the sedimentory rock. Fracture in stronger rocks occurs along the fault zone. In this case hard rock may be excavted by J/W, rather than B/W, see Fig. 2. Annex A


2 Accurate confirmation is the job of Geologist/ Material Engineer after inspectiong of the site.

1htnon Awais Ahmed


Geologist Rate Analysis Section P&D Department AJ&K

Ht J- A Jonal. Engr. Altaf Ahmed Chief Rate Analysis Section 23/01/2012

Ph. 05822-924117 P&D Department AJ&K





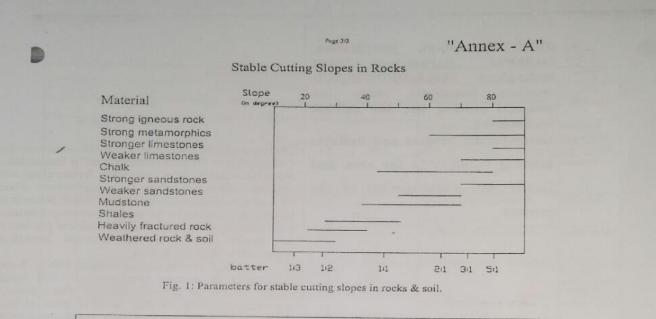

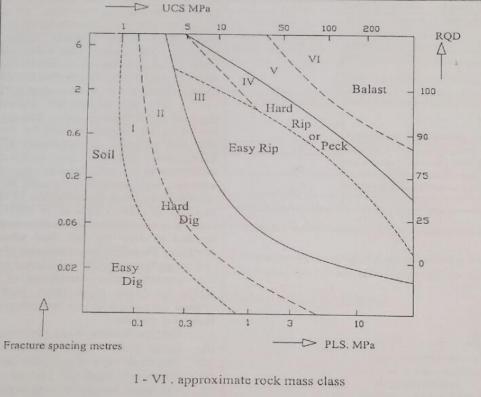


Fig. 2: Diagram shows ranges of different material with respect to UCS fracture spacing. SOURCE

Foundations of Engineering Geological 2/ed. By TONY WALTAAM, Civil Engineering Department, Natingham Trent University, UK.

Engr. Ishfaq Ba Research Officer

Ihan m Awais Ahmed Geologist

Imul Engr. Altaf Ahmed

Chief R.A. Section P&DD 23/01/2012



## SECTION - 0

S.No	Name of Source	Rock Name	Location of Deposit	Estimated Reserve	Remarks	District
1.	Khurshidabad Limestone	limestone	Khurshidabad Village	15.0 million M <sup>3</sup>	All type of concrete work	Kahuta
2.	Khurshidabad Dolorite	Dolorite	Khurshidabad Village	4.0 million M <sup>3</sup>		
3.	Palangi Nullah Gravel	Gravel	Palangi	L/S	Only for	
4.	Tangari Battar River Gravel		Battar	Under prospection	marginal use concrete	
5.	Malal Bagla sandstone	Sandstone	Malal Bagla	6.0 million M <sup>3</sup>	(2000psi strength) with	Bagh
6.	DanaSandstone		Dana	8.0 million M <sup>3</sup>	OPC	
7.	Chamankot sandstone		Chaman Kot	12.0 million M <sup>3</sup>		
8.	Bess Bagla sandstone		Bess Bagla	12.0 million M <sup>3</sup>		
9.	Dhulli Sandstone		Sandstone	6.0 million M <sup>3</sup>		
10.	Shujahabad sandstone		Shujaabad	10.0 million M <sup>3</sup>	1	
11.	Patraita Sandstone		Patriata	3.0 million M <sup>3</sup>		
12.	Lassdanna Sandstone		Lassdanna	20.0 million M <sup>3</sup>		
13.	Yadgar limestone	Limestone	Yadgar	25.50 million M <sup>3</sup>	All type of	
14.			Batmang		concrete work	
15.			Hill Seri Dara	Under	With Project Specific	
				prospection	studies	
16.	-		Zahid Chowk	Under		
			Pirchinasi road	prospection		
17.	Noseri Dolorite	Dolorite	Noseri Chelhana	7.0 million M <sup>3</sup>		
18.	Lamnian Dolerite	Dolorite	Lamnian			-
19.	Eran Sandstone	Sandstone	Near Kohala	Under prospection	Only for marginal use	Muzaffarabad/ Hattian
20.	Chattar Kalas	Gravel	Agar Naullah	Under	concrete (upto 2000psi	d/ F
	sandstone gravels		Chattar Kalas	prospection	strength) with	lbae
21.	Komikot sandstone	Sandstone	Komikot	Under	OPC	ara
				prospection		aff
22.	Niazpura Dolomitic Limestone	Limestone	Niazpura	5.0 M <sup>3</sup>	All type of concrete work With Project Specific studies	Mu
23.	Lamnian Meta Basalt	Igneous Bodies	Lamnian	7.0 M <sup>3</sup>	All type of Concrete work Except High Strength Concrete (upto 2000psi And Asphalt Layer	

#### Recommended Construction Material Sources located in ten Districts & Around AJ&K



30.Mangla jatli roadprospectionmarginal use concrete (upto 2000 psi strength) with OPC31.Jeri KasUnder prospectionSkater NaullahUnder prospectionOPC32.SkaterSkater NaullahUnder prospectionOPCImaginal use concrete (upto 2000 psi strength) with OPC33.Kanali KasUnder prospectionKot SarsawaUnder prospectionImaginal use concrete (upto 2000 psi strength) with OPC34.Kot SarsawaUnder prospectionImaginal use concrete (upto 2000 psi strength) with OPCImaginal use concrete (upto 2000 psi strength) with OPC35.Hari KasUnder prospectionImaginal use concrete (upto 2000 psi strength) with OPCImaginal use concrete (upto 2000 psi strength) with OPC36.Panjari NullahGravelPanjariUnder prospectionImaginal use concrete (upto 2000 psi strength) with OPC38.ChaprianChaprianUnder prospectionStrength) with OPCStrength) with OPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Projection StudiesAbbo41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - MarbleStone Masonry prospectionStone Masonry44.Neelum Granite KeranGraniteDanjar - KeranUnder prospectionStone Masonry44.Neelum Granite KeranGraniteDanjar - KeranUnder prospection	Kotli
2.7.   Ramon botomic   Rom rakin road   30.0 minition M   specific study except Pre-stress concrete     26.   Poonch river gravel   Gravel   Distributed along Rive terraces   Coldy for marginal use concrete (upto 2000 psi strength) with GDC     27.   Poonch terraces  do   L/S   Conty for marginal use concrete (upto 2000 psi strength) with GDC     28.   Khorban Nullah gravel   Gravel   Khari Sharif   Under prospection   Contrete (upto 2000 psi strength) with GDC     30.   Mangla jatli road   Mangla   Under prospection   Contrete (upto 2000 psi strength) with GDC   Minor Prospection     31.   Jeri Kas   Under prospection   Skater Naullah   Under prospection   Contrete (upto 2000 psi strength) with GDC     33.   Kanali Kas   Under prospection   Skater Naullah   Under prospection   Contrete (upto 2000 psi strength) with GDC     34.   Kot Sarsawa   Under prospection   Conty for marginal use concrete (upto 2000 psi strength) with GDC   Gravel   Panjari   Under prospection   Gravel   Panjari   Under prospection   Gravel   Panjari   Gravel   Gravel   Panjari   Gravel   Minor Marginal use concrete (upto 2000 psi strength) with   Gravel   Pan	
26.     Poonch river gravel     Gravel     Distributed along Rive terraces     stress concrete Only for marginal use concrete (upto 2000 psi strength) with OPC     Marginal use concrete (upto 2000 psi strength) with OPC     Mit       29.     Khari Sharief     Gravel     Khari Sharif     Under prospection     Only for marginal use concrete (upto 2000 psi strength) with OPC     Mit       30.     Mangla jatli road     Mangla     Under prospection     OPC     OPC       31.     Jeri Kas     Under prospection     Skater     Nullah     OPC       32.     Skater     Skater     Nulder prospection     OPC     Imarginal use concrete (upto 2000 psi strength) with     Mit       33.     Kanali Kas     Under prospection     Only for marginal use concrete (upto 2000 psi strength) with     Mit       34.     Kot Sarsawa     Under prospection     Only for marginal use concrete (upto 2000 psi strength) with     Mit       35.     Hari Kas     Dandar     Under prospection     Only for marginal use concrete (upto 2000 psi strength) with     Shit       37.     Dandhar Nullah     Gravel     Panjari     Under prospection     Concrete (upto 2000 psi strength) with     Concrete (upt	
26.   Poonch river gravel   Gravel   Distributed along Rive terraces   L/S   marginal use concrete (upto 2000 psi strength) with OPC     28.   Khorban Nullah gravel   Gravel   Khari Sharif   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC   Mi     30.   Mangla jatli road   Mangla   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC   Mi     31.   Jeri Kas   Jeri Kas   Under prospection   OPC   OPC     32.   Skater   Skater   Skater Naullah   Under prospection   Only for marginal use concrete (upto 2000 psi   Mi     34.   Kot Sarsawa   Under prospection   Only for marginal use concrete (upto 2000 psi   Mi     35.   Hari Kas   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi   Bhi     36.   Panjari Nullah   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi   Bhi     37.   Dandhar Nullah   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi   All type of concrete work with Projeet Specific     39.   Bakot Nath	
Rive terraces   marginal use concrete (upto 2000 psi strength) with 0DC     28.   Khorban Nullah gravel  do   L/S   concrete (upto 2000 psi strength) with 0DC     29.   Khari Sharief   Gravel   Khari Sharif   Under prospection   Only for marginal use concrete (upto 2000 psi   Mi     30.   Mangla jatli road   Mangla   Under prospection   Only for strength) with OPC   Mi     31.   Jeri Kas   Jeri Kas   Under prospection   OPC   Imarginal use concrete (upto 2000 psi   OPC     33.   Kanali Kas   Jeri Kas   Under prospection   OPC   Imarginal use concrete (upto 2000 psi   Imarginal use concrete (upto 2000 psi   OPC     34.   Kot Sarsawa   Under prospection   Imarginal use concrete (upto 2000 psi   Imarginal	
27.   Poonch terraces  do   L/S   concrete (upto 2000 psi strength) with OPC     28.   Khorban Nullah gravel   Gravel   Khari Sharif   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC     30.   Mangla jatli road   Mangla   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC   Mi marginal use concrete (upto 2000 psi strength) with OPC     31.   Jeri Kas   Jeri Kas   Under prospection   OPC   OPC     32.   Skater   Skater Naullah   Under prospection   OPC   OPC     33.   Kanali Kas   Under prospection   Imarginal use concrete (upto 2000 psi strength) with   OPC     34.   Kot Sarsawa   Under prospection   Imarginal use concrete (upto 2000 psi strength) with   OPC     35.   Hari Kas   Dandar   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with   OPC     37.   Dandhar Nullah   Gravel   Panjari   Under prospection   OPC 2000 psi strength) with   OP	
28.   Knoroan Nullah gravel  do   L/S   strength) with opc     29.   Khari Sharief   Gravel   Khari Shariif   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with 0PC     30.   Mangla jatli road   Mangla   Under prospection   OPC     31.   Jeri Kas   Under prospection   OPC   OPC     32.   Skater   Skater   Skater Naullah   Under prospection   OPC     33.   Kanali Kas   Under prospection   OPC   OPC     34.   Kot Sarsawa   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with     35.   Hari Kas   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with   Strength) with     36.   Panjari Nullah   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with   2000 psi st	
29.Khari ShariefGravelKhari SharifUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCMi30.Mangla jatli roadManglaUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCMi31.Jeri KasJeri KasUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCMi32.SkaterSkater NaullahUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPC33.Kanali KasUnder prospectionUnder prospectionImage: Concrete (upto 2000 psi strength) with OPC34.Kot SarsawaUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPC35.Hari KasUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPC37.Dandhar NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPC38.ChaprianLimestoneBakot30.0 million M³All type of concrete work With Project Specific studies40.Bakot KasNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasaltNeelum Valley Road along Noseri - MarbleStone Masonry43.Islampur-Jura GraniteGraniteStandoq- Islampur <t< td=""><td></td></t<>	
30.   Mangla jatli road   Mangla   Under prospection   marginal use concrete (upto 2000 psi strength) with OPC     31.   Jeri Kas   Jeri Kas   Under prospection   OPC     32.   Skater   Skater   Skater Naullah   Under prospection     33.   Kanali Kas   Under prospection   Imaginal use concrete (upto 2000 psi strength) with OPC     33.   Kanali Kas   Under prospection   Imaginal use concrete (upto 2000 psi strength) with OPC     34.   Kot Sarsawa   Under prospection   Imaginal use concrete (upto 2000 psi strength) with OPC     36.   Panjari Nullah   Gravel   Panjari   Under prospection     37.   Dandhar Nullah   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC     38.   Chaprian   Chaprian   Under prospection   OPC   OPC     39.   Bakot Nathia-Gali   limestone   Bakot   30.0 million M³   All type of concrete work With Project Specific     41.   Noseri Dolorite   Dolorite   Neelum Valley Road along Noseri - Marble   9.03 million M³   marginal use with OPC     42.   Noseri volcanics   Metabasalt	
30.Mangla jatli roadManglaUnder prospectionconcrete (upto 2000 psi strength) with OPC31.Jeri KasUnder prospectionConcrete (upto 2000 psi strength) with OPC32.SkaterSkaterUnder prospectionOPC33.Kanali KasUnder prospectionUnder prospectionOPC34.Kot SarsawaUnder prospectionUnder prospectionImage: Concrete (upto 2000 psi strength) with35.Hari KasUnder prospectionImage: Concrete (upto prospectionImage: Concrete (upto 2000 psi strength) with36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with37.Dandhar NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work with Project Specific studies40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasalt GraniteSandoq- Islampur-Jura GraniteStone Masonry	lirpur
30.   Mangla jatli road   Mangla   Under prospection   2000 psi strength) with OPC     31.   Jeri Kas   Under prospection   OPC   OPC     32.   Skater   Skater Naullah   Under prospection   OPC     33.   Kanali Kas   Under prospection   Jeri Kas   Under prospection     34.   Kot Sarsawa   Kot Sarsawa   Under prospection   Jeri Kas   Under prospection     35.   Hari Kas   Under prospection   Only for marginal use to concrete (upto 2000 psi strength) with   Bhi concrete (upto 2000 psi strength) with   Bhi concrete work with Prospection     36.   Panjari Nullah   Gravel   Panjari   Under prospection   Concrete (upto 2000 psi strength) with   Bhi concrete work with Prospection   Strength) with   Bhi concrete work with Prospection   Abbo With Prospection   Abbo Strength) with   Abbo Strength) with   Abbo Strength)     39.   Bakot Kas   Dolorite   Neelum Valley   1.5 million M³   All type of concrete work with Prospection   Abbo Strength)     41.   Noseri volcanics   Metabasalt   Road along Noseri - Marble   9.03 million M³   marginal use with OPC     43.   Islampur-Jura Granite	
31.   Jeri Kas   Under prospection   OPC     32.   Skater   Skater   Skater Naullah   Under prospection     33.   Kanali Kas   Kanali Kas   Under prospection   Image: Composition     34.   Kot Sarsawa   Under prospection   Image: Composition   Image: Composition     35.   Hari Kas   Under prospection   Image: Composition   Image: Composition   Image: Composition     36.   Panjari Nullah   Gravel   Panjari   Under prospection   Only for marginal use concrete (upto 2000 psi strength) with OPC   Bhi     38.   Chaprian   Under prospection   OPC   Strength) with OPC   OPC     40.   Bakot Kas   Image: Composition   Image: Composition   Studies   Abbo     41.   Noseri Dolorite   Dolorite   Neelum Valley Rooad along Noseri - Marble   9.03 million M <sup>3</sup> marginal use with OPC   Abbo     43.   Islampur-Jura Granite   Granite   Sandoq- Islampura   Under prospection   Stone Masonry	
31.   John Rus   John Rus   John Rus   Prospection     32.   Skater   Skater Naullah   Under   prospection     33.   Kanali Kas   Kanali Kas   Under   prospection     34.   Kot Sarsawa   Under   prospection   Image: Construction of the section of	
32.   Skater     33.   Kanali Kas     33.   Kanali Kas     34.   Kot Sarsawa     35.   Hari Kas     36.   Panjari Nullah     37.   Dandhar Nullah     38.   Chaprian     39.   Bakot Nathia-Gali     11.   Noseri Dolorite     41.   Noseri Dolorite     42.   Noseri volcanics     43.   Islampur-Jura Granite     43.   Islampur-Jura Granite	
33.Kanali KasprospectionA bigged33.Kanali KasKanali KasUnder prospectionImage: Constraint of the second	
33.   Kanali Kas   Inder     33.   Kanali Kas   Under     34.   Kot Sarsawa   Under     35.   Hari Kas   Inder     36.   Panjari Nullah   Gravel   Panjari   Under     37.   Dandhar Nullah   Gravel   Panjari   Under   Only for     38.   Chaprian   Under   prospection   Strength) with   OPC     39.   Bakot Nathia-Gali   limestone   Bakot   30.0 million M <sup>3</sup> All type of     41.   Noseri Dolorite   Dolorite   Neelum Valley   1.5 million M <sup>3</sup> studies     42.   Noseri volcanics   Metabasalt   Road along   9.03 million M <sup>3</sup> marginal use with OPC     43.   Islampur-Jura Granite   Granite   Sandoq-   Under   Stone Masonry	
34.Kot SarsawaFrospectionFrospection35.Hari KasKot SarsawaUnder prospectionImage: Concrete (uptone)36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (uptone)Bhi37.Dandhar NullahGravelPanjariUnder prospectionOnly for marginal use concrete (uptone)Bhi38.ChaprianChaprianUnder prospectionOPCOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbo40.Bakot KasDoloriteNoseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPCAbbo43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospectionStone Masonry	
34.Kot SarsawaKot SarsawaUnder prospectionImage: Constraint of the second secon	
35.Hari KasProspectionP	
35.Hari KasHari KasUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with37.Dandhar NullahDandarUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with38.ChaprianChaprianUnder prospectionOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project Specific40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	
36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) withBhi37.Dandhar NullahDandarUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with OPCBhi38.ChaprianChaprianUnder prospectionOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project Specific studiesAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	
36.Panjari NullahGravelPanjariUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) with37.Dandhar NullahDandarUnder prospectionOnly for marginal use concrete (upto 2000 psi strength) withBhi38.ChaprianChaprianUnder prospectionOPC2000 psi strength) with OPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project Specific studiesAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri volcanics1.5 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	
37.Dandhar NullahDandarprospectionmarginal use concrete (upto 2000 psi strength) with OPC38.ChaprianChaprianUnder prospectionOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project Specific studiesAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	
37.Dandhar NullahDandarUnder prospectionconcrete (upto 2000 psi strength) with OPC38.ChaprianChaprianUnder prospectionOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPCAbbo43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	imber
37.Dandnar NullanDandarOnder prospection2000 psi strength) with OPC38.ChaprianChaprianUnder prospectionOPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC41.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	
38.ChaprianChaprianUnder prospectionstrength) with OPC39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project SpecificAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC41.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	
Image: SectionImage: SectionProspectionProspectionAll type of concrete work With Project SpecificAbbo39.Bakot Nathia-GalilimestoneBakot30.0 million M³All type of concrete work With Project Specific studiesAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	
39.Bakot Nathia-GalilimestoneBakot30.0 million M3All type of concrete work With Project Specific studiesAbbo40.Bakot KasDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3All type of concrete work Specific studiesAbbo41.Noseri volcanicsMetabasaltNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	
40.Bakot KasConcrete work With Project Specific studiesAbbo Abbo41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M3marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	
40.Bakot KasWith Project Specific studiesWith Project Specific studiesAbbe41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³marginal use with OPC42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	. 4 . 4 . 1
40.Bakot KasSpecific studiesAbbe41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³Amaginal use with OPC42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry prospection	itatabad
41.Noseri DoloriteDoloriteNeelum Valley Road along Noseri - Marble1.5 million M³studies42.Noseri volcanicsMetabasaltRoad along Noseri - Marble9.03 million M³marginal use with OPC43.Islampur-Jura GraniteGraniteSandoq- IslampuraUnder prospectionStone Masonry	ottabad
42. Noseri - Marble 9.05 minion M magnatuse with OPC   43. Islampur-Jura Granite Granite Sandoq- Islampura Under prospection Stone Masonry	
43. Islampur-Jura Granite Granite Sandoq- Islampura Under prospection Stone Masonry	
Islampura prospection	
44. Neelum Granite Keran Granite Danjar - Keran Under prospection   45. Dudhaish Assume the Material Assume the Materi	
45 Dudhaid Arganetary Material Material	
45 Dudhaid Annananan Matagathanta MTD and 1 676 111 163 D'	
45. Dudhnial Arenaceous Metacarbonates MT Bazar 1.656 million M <sup>3</sup> Bitumen, plain	
Carbonates Dudhnial Concrete but pot for pro	
not for pre- stress concrete	
46. Malik Seri Dolorite Dolorite Dolorite Between Khawaja 13.5 million M <sup>3</sup> stress concrete Seri and	
Kharigam Seri and   Kharigam along Seri and	
Neelum Valley	
47. Kel Dolorite dykes Dolorite Kelser - Kel Road Under All type of	
prospection concrete work	
48 Changen Mate Delorite Changen 1 776 million M <sup>3</sup> With Project	
48. Changan Meta Dolorite Changan - 1.776 minion M Specific Dolorite Dudhnial Road studies	



49.	Dhokran Gneiss Kel	Granitic Gneiss	Kel-Dhokran Road	Under prospection	Stone Masonry	
50.	Arja - Dalkot Section	Sandstone	Near Arja	Under prospection	Only for marginal use concrete (upto	Poonch
51.	Gio Nullah Rawalakot			Under prospection	2000psi strength) with	
52.	Khaigalla-Hajira outcrop		Near Hajira	Under prospection	OPC	
53.	Hajira Abbaspur road out crop		Hijira Abbaspur road out crop	Under prospection		
54.	Hajira Nar outcrop			Under prospection		
55.	Ban Ni Bhek Toli Pir Road		Along Toli Pir road	Under prospection		
56.	Jhandala Sandstone		Arja Tain Road Jhandal Locality	Under prospection		
57.	Pappay Nar	Sandstone	Along Tararkhal to Palandri Road	Under prospection		
58.	Tarar Khal			Under prospection		auti
59.	Nar near Tarar khal Bazar along Hajira road		Along Tararkhal to Hajira Road	Under prospection		Sudhnuti
60	Azad Pattan (Madan)		Azad Pattan - Kalri road	Under prospection	]	

18 18/2016

(Naveed Azad) Geologist/Material Engineer

18/8/2016

(Syed Ahmed Hassan) Geotechnical/Material Engineer

27 Al donal. 18/8/20 in

(Engr.Altaf Ahmed) Chief Rate Analysis-P&DD

### SECTION – 1

#### CARRIAGE

- 1. CARRIAGE OF MATERIALS INCLUDE LOADING, UNLOADING AND STACKING AT SITE.
- THE RATES ARE APPLICABLE TO CARRIAGE OF MATERIAL ON PACCA ROAD ONLY.
  FOR KACHA ROADS AN ALLOWANCE OF 25% EXTRA SHALL BE ALLOWED FOR 2<sup>ND</sup> SUBSEQUENT DISTANCE COVERED IN KM.(MILES) RATES.
  RATES UP TO 1<sup>ST</sup> MILE (1<sup>ST</sup> KM.) IS HOWEVER COMMON TO BOTH KACH AND PACCA ROADS.
- 3. FOR HILLY AREAS 25% ABOVE THE RATES IN THE PLAIN AREAS BE ALLOWED FOR TOTAL DISTANCE COVERED IN KM.(MILES).
- 4. THE TERM "KM." WHENEVER USED IS TO MEAN STATUE KILOMETER.
- 5. THE RATES FOR CARRIAGE BY BOAT OR STREAMER SHALL BE THE SAME AS BY ANY OTHER MECHANICAL MEANS ON LAND.






# SECTION - 2

# LOADING, UN-LOADING AND STACKING

1. THE RATE FOR LOADING INTO AND UN-LOADING FROM TROLLIES & BOATS WILL BE THE SAME AS FOR MOBILE TRUCKS.



# SECTION - 3

### EARTH WORK

- 1. THE SOIL CLASSIFACTION (HARD, VERY HARD, WET AND SLUSH) WILL BE APPROVED BY THE SUPERINTENDING ENGINEER.
- 2. IN CASE OF EMBANKMENT FILL, THE MODE OF MEASUREMETN WILL BE INDICATED IN THE TENDER.
- 3. IN CASE BANK MEASUREMENT IS NECESSARY, FOLLOWING ALLOWANCES SHOULD BE PROVIDED FOR:
  - a) DEDUCATION FOR SHRINKAGE FROM THE BANK MEASUREMENT WHEN THE EARTWORK IS DONE BY MANUAL LABOUR = 10%.
  - b) DEDUCATION FOR SETTLEMENT FROM THE BANK **MEASUREMENTS** WHEN THE EARTH-WORK IS DONE BY DIFFERENT TYPE OF MACHIANARY WILL BE AS UNDR: i. TRACTOR 6% ii. BULLDOZERS 4% iii. SCRAPERS 3% Where the above equipment is deployed in fleet the minimum factor specified will be applied.
- 4. NO DEDUCATION WILL BE MADE FOR RAMMED/ COMPACTED FILL.





### **SECTON-4**

#### DISMANTLING (DEMOLISHING)

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL AND BY PRODUCTS.
- 2. THE RATES FOR DISMANTLING ROOFS OR UPPER STORY FLOOR INCLUDE THE DISMANTLING OF ALL MATEHIALS, EXCEPT ROOF SUPPORTS SUCH AS BEAM AND TRUSSES.
- 3. ADD EXTRA 20% AND 25% FOR 2<sup>ND</sup> & 3<sup>RD</sup> AND 30% FOR 4<sup>TH</sup> & SUBSEQUENT FLOORS RESPECTIVELY.



#### **SECTION-5**

### PLAIN AND REINFORCED CONCRETE

- 1. RATES FOR ITEM 5-2 TO 5-4 ARE FOR UNFORMED CONCRETE
- 2. RATES FOR OTHER ITEMS ARE FOR MACHINE MIXED FORMED CONCRETE IN CASE EXIGENCY OF THE WORK SO WARRANTS, HAND MIXING MAY BE DONE WITH ADDITION OF 10% EXTRA CEMENT AT NO EXTRA COST.
- 3. THE CEMENT CONCRETE MAY EITHER BE PLAIN OR REINFORCED AND SHALL BE PAYABLE AT THE RATES SPECIFIED AGAINST RESPECTIVE ITEMS. THE STEEL REINFORCEMENT SHALL HOWEVER BE PAYABLE SEPARATELY UNDER APPLICABLE ITEMS 5-44 OF THE SCHEDULE.
- 4. RATES FOR ALL FINSHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSEK MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



#### **SECTION-6**

#### PRESTRESSED CONCRETE

- 1. RATES FOR ALL FINSHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRAI, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE PRESTRESSED CONCERETE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH SPECIFICATIONS LAID DOWN BY FREYSSINET OR SIMILAR SYSTEM.

# E SAMMU & KAR

### SECTION-7

#### PILE FOUNDATION CONCRETE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES FOR DRILLING FOR DIFFERENT SIZES OF PILE SHALL BE THE SAME AS FOR TUBEWELL GIVEN IN SECTION – 27.



#### SECTION-8

#### DAMP PROOF COURSE AND WATER PROOFING


1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.



#### **SECTION-9**

#### CEMENT CONCRETE BLOCK MASONRY

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.
- 2. NO PAYMENT SHALL BE MADE FOR FORMING CAVITIES IN BLOCK AND NO DEDUCTION TO BE MADE FOR HOLLOWNESS IN BLOCKS.
- SKIN THICKNESS OF HOLLOW BLOCKS SHALL BE 1" (25 mm) FOR BLOCK SIZE 300 x 100 x 200, 300 x 150 x 200, 225 x 100 x 150 AND 300 x 100 x 200.
- 4. SKIN THICKNESS OF HOLLOW BLOCKS SHALL BE 1.5" (38 mm) FOR BLOCK SIZE 300 x 200 x 200, 300 x 300 x 200, 225 x 200 x 150 AND 225 x 300 x 150.
- 5. CONCRETE BLOCK SHOULD MEET THE REQUIREMENT OF 2000 PSI CRUSHING STRENGTH.





#### **SECTION-10**

# **Bridges**

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY- PRODUCTS AND SITE CLEARANCE.
- 2. IF CONCRETE MIXER OR HIGH FREQUENCY VIBRATOR, ETC. SUPPLIED BY THE GOVERNMENT, ALL CHARGES INCLUDING DEPRECIATING WILL BE RECOVERED FROM THE CONTRACTOR.
- 3. SUBSEQUENT CARRIAGE OF CRUSH STONE AGGREGATE WILL BE PAID ACCORDING TO THE WHOLE DISTANCE TO THE SITE OF WORK, SHALL BE CALCULATED ON THE BASIS OF RATE OF THE ACTUAL MEAN OF TRANSPORT USED IN CARRIAGE. IT SHALL BE PAYABLE FROM THE NEAREST APPROVED QUARRY.

# SECTION-11

### **BRICK WORK**

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE RATE APPLIES TO ALL SIZES OF BRICKS.
- 3. IN 2<sup>ND</sup> OR 3<sup>RD</sup> CLASS BRICKS ARE USED INSTEAD OF FIRST CLASS, THE DIFFERENCE IN RATE OF BRICKS IS DEDUCTED.
- 4. NO DEDUCTION IN MEASUREMENTS SHALL BE MADE FOR OPENING HAVING SUPERFICIAL AREA NOT EXCEEDING ONE SQUARE FOOT (0.35 SQUARE METERS).





### SECTION-12

# STONE MASONRY

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



### **SECTION-13**

# ROOFING

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. ADD EXTRA 5% AND 10% SECOND, THIRD, 15% FOR FOURTH AND SUBSEQUENT FLOOR RESPECTIVELY.



\_\_\_\_\_

### **SECTION-14**

# FLOORING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



\_\_\_\_\_

# **SECTION-15**

# FINISHING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



#### **SECTION-16**

# WOOD WORK

- 1. NO EXTRA RATE IS TO BE PAID FOR SAWING.
- 2. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



#### SECTION-17

# PAINTING AND VARNISHING

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES INCLUDE CHARGES FOR SCAFFOLDING AND OTHER ARRANGEMENTS AT ANY HEIGHT AND IN ANY FLOOR.
- 3. RATES FOR PAINTING SASHES, FANLIGHT, FULLY GLAZED OR FULLY GAUGED DOORS AND WINDOWS SHALL BE 60% OF RESPECTIVE ITEMS.



#### **SECTION-18**

# LINING OF CANALS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. RATES ALSO INCLUDE CURING FOR SPECIFIED PERIOD WHEREVER NECESSARY.
- 3. NOMINAL DIMENSIONS OF TILE OR BRICK SHALL BE TAKEN FOR THE PURPOSE OF MEASUREMENT AND PAYMENT.
- 4. JOINTS TREATMENT WILL BE PAID FOR RESPECTIVE ITEMS IN SECTION – 5 "CONCRETE"



#### **SECTION-19**

# PROTECTION AND DIVERSION WORKS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL BY PRODUCTS AND SITE CLEARANCE.
- 2. THE COMPOSITE RATES OF THE ITEMS IN WHICH STONE, BOULDER, SHINGLE ETC. AND USED DO NOT CONTAIN THE CARRIAGES OF THESE MATERIALS WHICH WILL BE PAID SEPARATELY WHICHEVER MEANS OF TRANSPORT IS ADOPTED. THE SUPPLY AND CARRIAGE TO SITE OF WORK OF ALL OTHER MATERIAL, REQUIRED IN ITEM IS INCLUDED IN THE COMPOSITE RATE.
- 3. THE CARRIAGE OF STONE OR SPAWL WILL BE PAID ON THE BASIS OF ACTUAL STACK MEASUREMENT (WITHOUT ANY REDUCTION FACTOR) OF THE STONE, BOULDERS, SHINGLE OR SPAWL CARRIED.
- 4. THE STONE, BOULDERS OR SPAWL IS WHERE ISSUED FORM STOCK AND THE CONTRACTOR IS PAID FOR CARRIAGE AND /OR LABOUR ONLY OR WHERE SUCH STONE PRODUCT IS SUPLLIED, CARRIED OR HANDLED BY THE CONTRACTOR IN WHICH NO LAYING IS REQUIRED, THE ACTUAL STACK MEASUREMENT (WITHOUT ANY REDUCTION FACTOR) SHALL FORM THE BASIS OF PAYMENT OF SUPPLY OR CARRIAGE OF THE STONE, BOULDER OR SPAWL ETC. THE QUANTITY OF FINSHED AND COMPLETED ITEM OF WORK SHALL FORM THE BASIS OF THE LAYING.
- 5. IN CASE OF THE ITEMS IN WHICH THE RATES INCLUDE CARRIAGE OF STAKES, BUSHING, PILCHI, SARKANDA OR FRASH ETC. WITHIN ONE KM.
  - a) THE COST OF THE CARRIAGE WITHIN ONE KM. SHALL NOT BE DEDUCTED FROM THE CARRIAGE CHARGES TO FOLLOW THEREAFTER FROM THE POINT OF SUPPLY.
  - b) IF THE SITE OF WOK HAPPENS TO BE WITHIN ONE KM. OF THE SOURCE OF SUPPLY, THE MATERIAL WILL BE COLLECTED AND MEASURED AT SITE OF WORK AND NO EXTRA CARRIAGE WOULD BE ADMISSIBLE IN SUCH CASES.
  - c) WHERE THE SITE OF THE WORK IS SITUATED AT MORE THAN ONE KM. DISTANCE FROM THE SOURCE OF SUPPLY, THE POINT OF SUPPLY WILL BE FIXED CAREFULLY BY THE ENGINEER-IN-CHARGE IN SUCH A WAY THAT THE CARRIAGE CHARGES WOULD BE ARRIVED AT THE MOST ECONOMICALLY.EXTRA CHARGES WILL BE ADMISSIBLE FROM THE PLACE OF STARTING POINT. THE DEMARCATION OF THE PLACE OF SUPPLY SHALL BE PRE-DETERMINED BEFORE CALLING THE TENDERS.
- 6. IN CASE OF STONE PITCHING WORK, NO VOIDS DEDUCTION WILL BE MADE WHILE MEASURING THE FINISHED WORK.

# THE REAL PROPERTY OF THE REAL

### SECTION-20

# OUTLETS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE ITEMS OF WORK INVOLVED IN CONSTRUCTION OF OUTLETS SUCH AS EARTHWORK, CONCRETE AND BRICK WORK SHALL BE PAID FOR UNDER RESPECTIVE ITEMS OF THE RELEVANT SECTION.
- 3. THE MANUFACTURE, SUPPLY AND DELIVERY TO SITE OF A.P.M. AND/OR O.F. OUTLETS IRON BLOCKS SHALL BE THE RESPONSIBILITY OF THE DEPARTMENT.



#### SECTION-21

# ROAD AND ROAD STRUCTURES

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE RATES INCLUDE PROVISION AND MAINTENANCE OF FIELD TEST LABOUATORY STAFF, COST OF MATERIAL FOR TESTING ETC.
- 3. PAYMENTS FOR ITEMS OF ROADS AND ROAD STRUCTURE SHALL BE MADE FROM THIS SECTION.
- 4. BITUMEN FULFILLING THE INTERNATIONAL STANDARDS LIKE :
- (i). ASTM-D-946 and AASHTO-M-20 (Penetration)
- (ii). ASTM-D-3381 and AASHTO-M-226 (Viscosity)
- (iii). ASTM-D-6373 and AASHTO-M-320 (Graded Binder)
- 5. SHOULD BE USED AFTER BATCHWISE TESTING AT SITE, AS PER DIRECTIONS OF ENGINEER INCHARGE.



## **SECTION-22**

# SHEET PILING

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



#### **SECTION-23**

# PLUMBING, SANITARY INSTALLATIO & GAS FITTINGS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. THE RATES INCLUDE CUTTING AND MAKING GOOD OF THE SURFACE OF WALLS, ROOFS, AND FLOORS ETC. WHER NECESSARY.
- 3. ADD 10% EXTRA FOR FIXING SPECIALS IN REPAIR WORK FOR ITEM 23-46.



#### SECTION-24

# SURFACE DRAINAGE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. CEMENT PLASTER WHERE APPLIED SHALL BE MEASURED FOR PAYMENT SEPERATELY.



#### **SECTION-25**

## SEWERAGE

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. EXCAVATION AND BACKFILLING FOR FOUNDATION AND TRENCHES SHALL BE PAID FOR SEPARATELY.
- 3. DEPTH OF CHAMBER SHALL BE MEASURED VERTICALLY FROM TOP OF COST IRON COVER TO TOP SURFACE OF FLOORING.
- 4. IF SPECIFACATIONS OF MANHOLES AS MENTIONES IN ITEM NO. 25-4 TO 25-8 ARE NOT MET THAN PAYMENT SHALL BE MADE FOR DIFFERENT ITEMS FROM OTHER SECTIONS OF THIS SCHEDULE.



#### **SECTION-26**

# SINKING OF WELLS

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.
- 2. WELL CURBS TO BE LAID AT SPRING LEVEL OR AS DEEP AS POSSIBLE.
- 3. THE OUTER DIMENSIONS OF THE CURB SHALL FORM BASIS OF PAYMENT.



#### SECTION-27

# TUBEWELL AND WATER SUPPLY

- 1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.
- 2. THE CAST IRON PIPES AND FITTINGS SHALL COMPLY WITH B.S. 78 FOR SPIGOT AND SOCKET, CAST IRON VERTICALS PIPES AND B.S. 2035 FOR FLANGED PIPES.
- 3. P.V.C. PIPES AND FITTINGS SHALL COMPLY WITH B.S. 3505.
- 4. ASBESTOS CEMENT PIPES AND FITTINGS SHALL COMPLY WITH B.S. 486
- 5. GALVANIZED IRON PIPES AND FITTINGS SHALL COMPLY WITH B.S. 1387-1967



## **SECTION-28**

# IRON STEEL & ALUMINIUM WORK

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



## **SECTION-29**

# HORTICULTURE

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS.



## **SECTION-30**

# ELECTRICAL INSTALLATIONS

1. RATES FOR ALL FINISHED WORKS INCLUDE THE REMOVAL OF SURPLUS DEBRIS, UNUSED MATERIAL, BY PRODUCTS AND SITE CLEARANCE.



### **BASIC DATA**

THE BASIC RATES OF CONSTRUCTION MATERIALS, LABOUR AND HIRE CHARGES OF PLANT & EQUIPMENT HAVE BEEN LINKED WITH FILES IN DETAILED ANALYSIS (Volume-1). ANY REVISION INITIATED IN THE "BASIC DATA" FILE CORRESPONDINGLY REVISE THE RELEVENT ITEM RATE. THESE RATES HAVE BEEN OBTAIND AFTER EXTENSIVE MARKET SURVEY.